


INT-1.5-2019
MOUNTING MANUAL

FritsJurgens®


SYSTEM M

COMPONENTS SYSTEM M



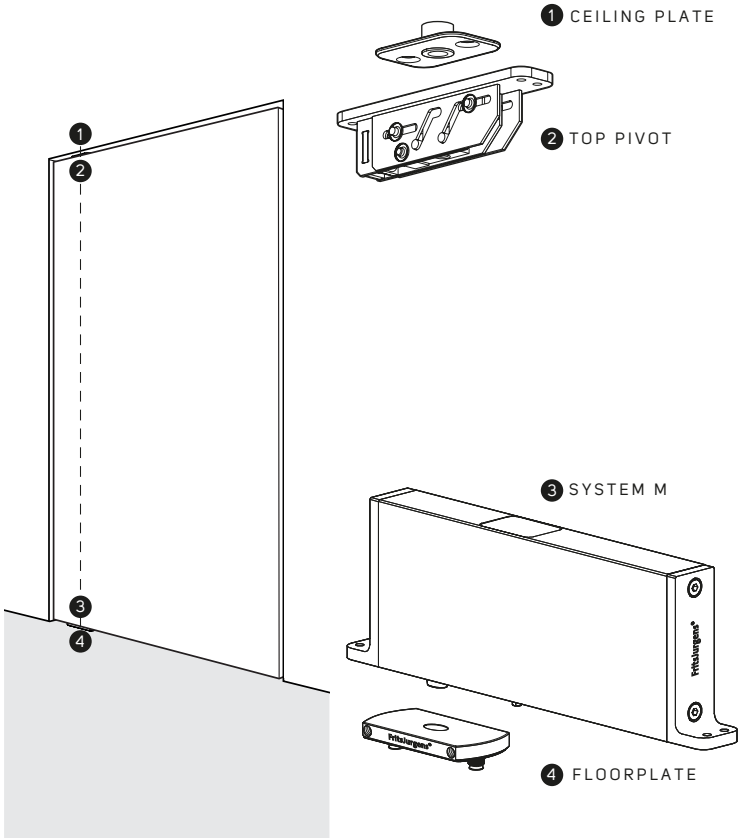


GAPS AROUND THE DOOR


TOP SEAM
MIN. 4MM
MAX. 10MM

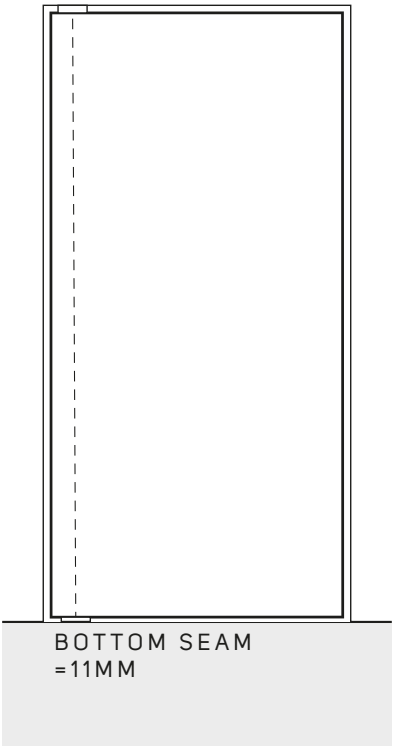

MOUNTING KIT

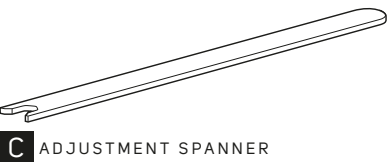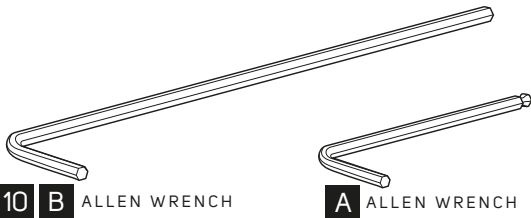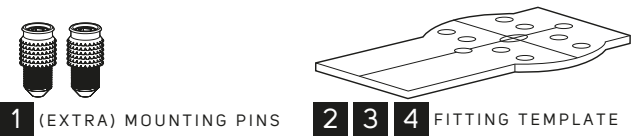


FRITSJURGENS®
+31 598 343 410
INFO@FRITSJURGENS.COM
WWW.FRITSJURGENS.COM




ALSO CONSULT THE
ONLINE MANUAL

GAP CALCULATOR

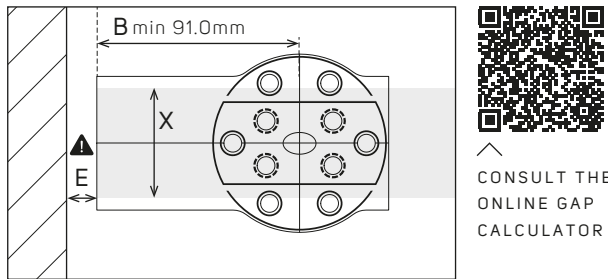


	40	50	60	70	80	90	100	X
B								
91	4	5	7	9	10	12	15	E
250	3	3	4	4	5	6	7	
500	2	3	3	3	4	4	5	
1000	2	2	3	3	3	3	3	
1500	2	2	2	2	2	3	3	
2000	2	2	2	2	2	2	3	
E	MINIMUM GAP BETWEEN DOOR AND WALL (IN MM)							
B	DISTANCE PIVOT POINT TO BEGINING EDGE OF DOOR (IN MM)							
X	DOOR THICKNESS (IN MM)							

1 MOUNT THE FLOORPLATE

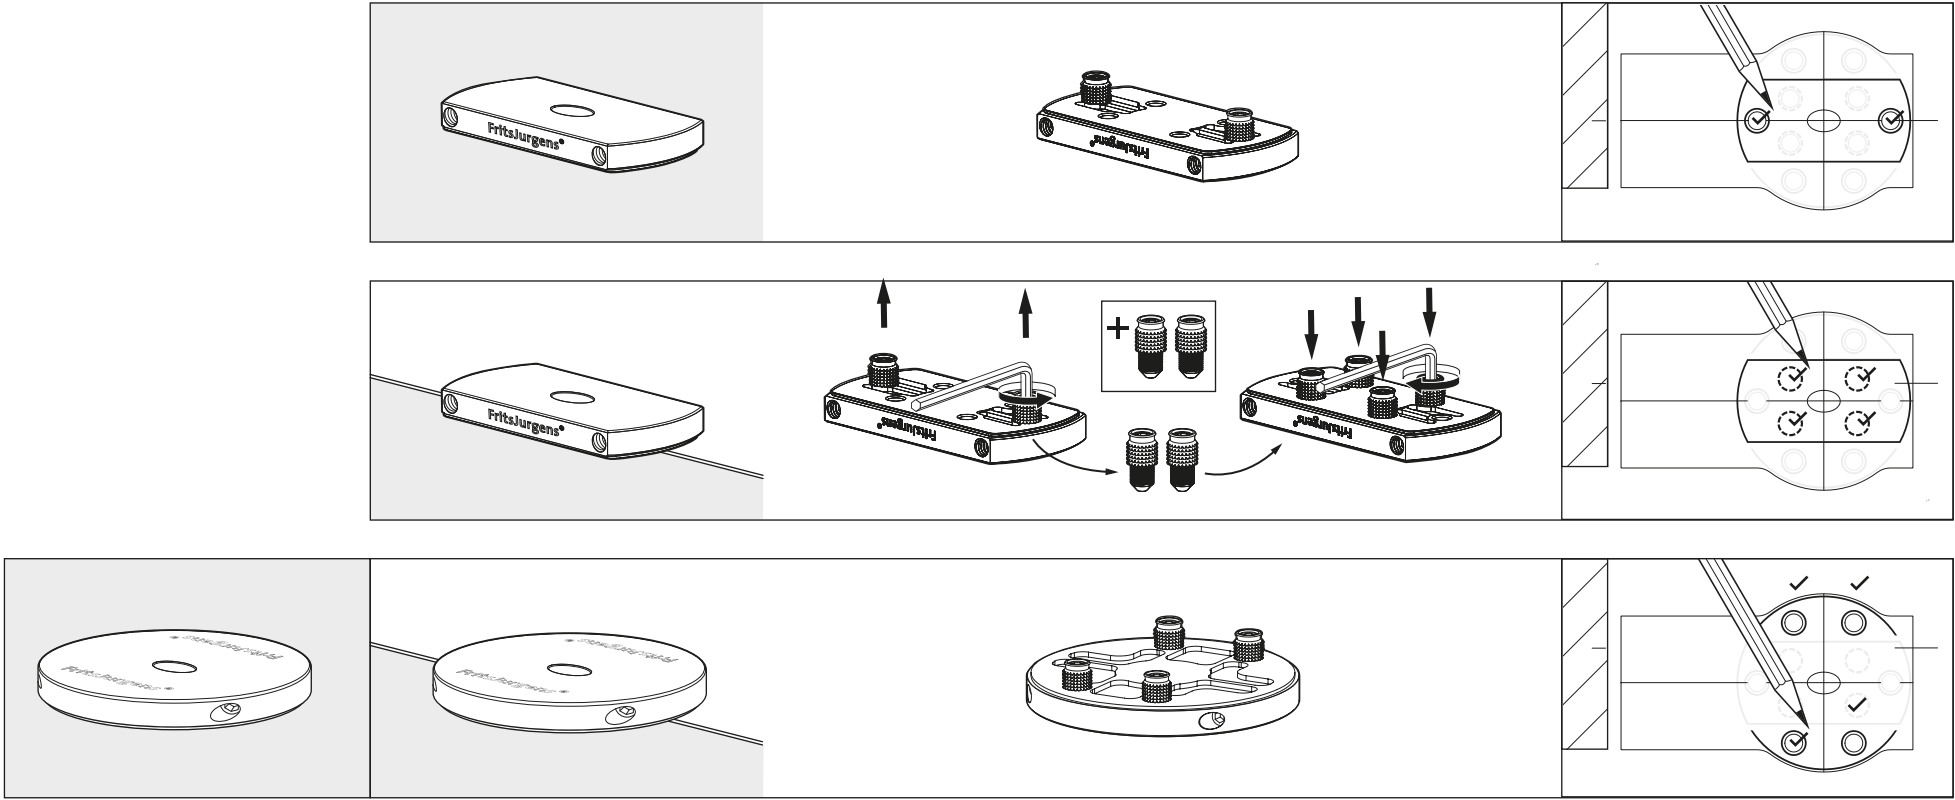


2

3

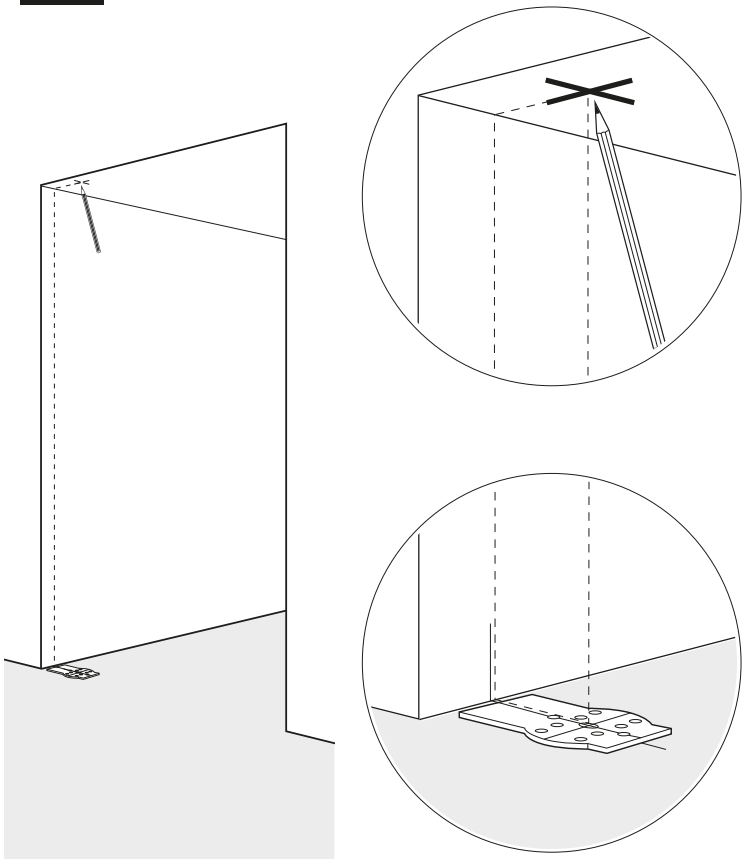


4


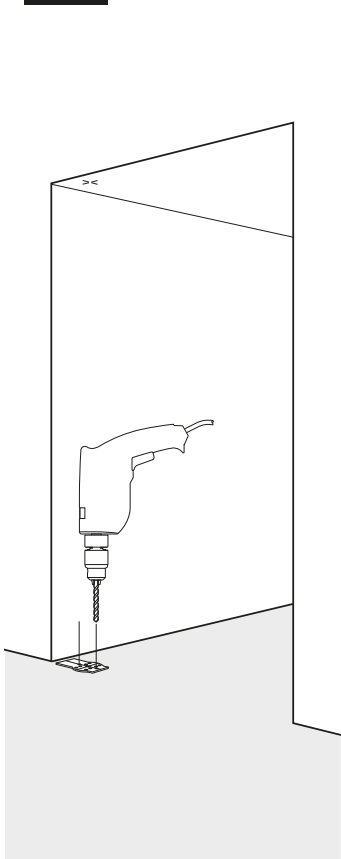


WOOD	OTHER SURFACES
Ø7.5MM (Ø19/64 IN)	Ø8.0MM (Ø 5/16 IN)
8.0MM (5/16 IN)	8.0MM (5/16 IN)






5

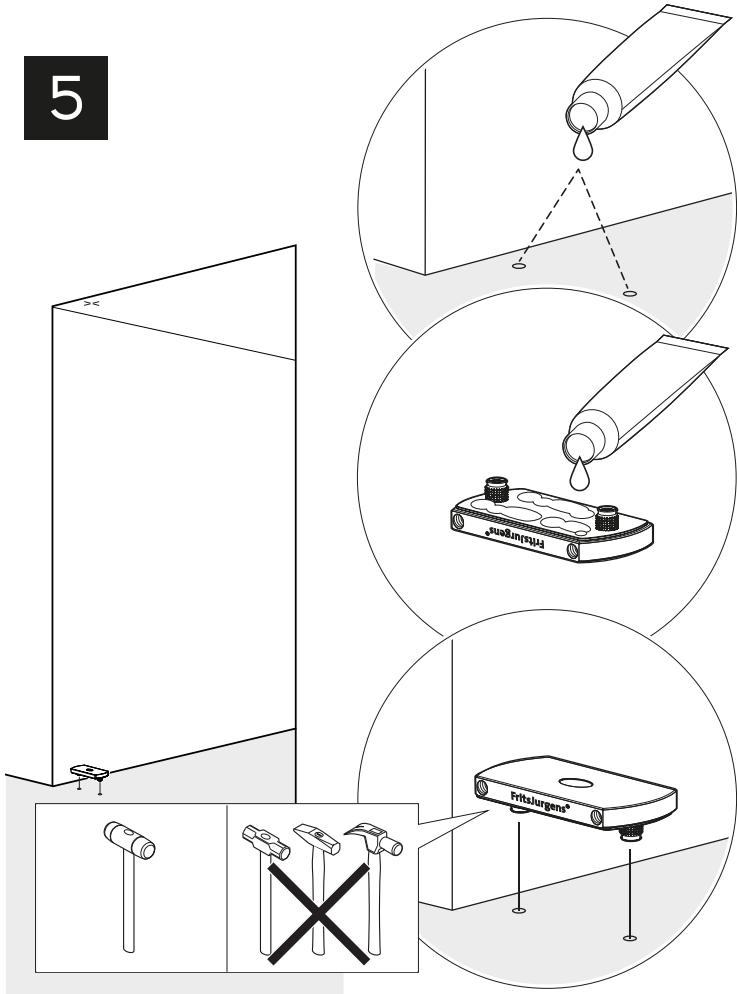



6 MOUNT THE CEILING PLATE

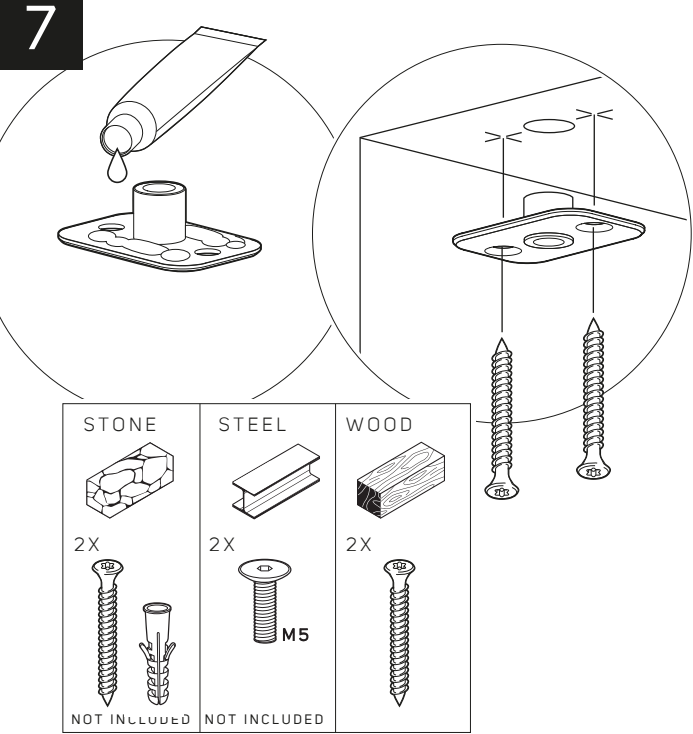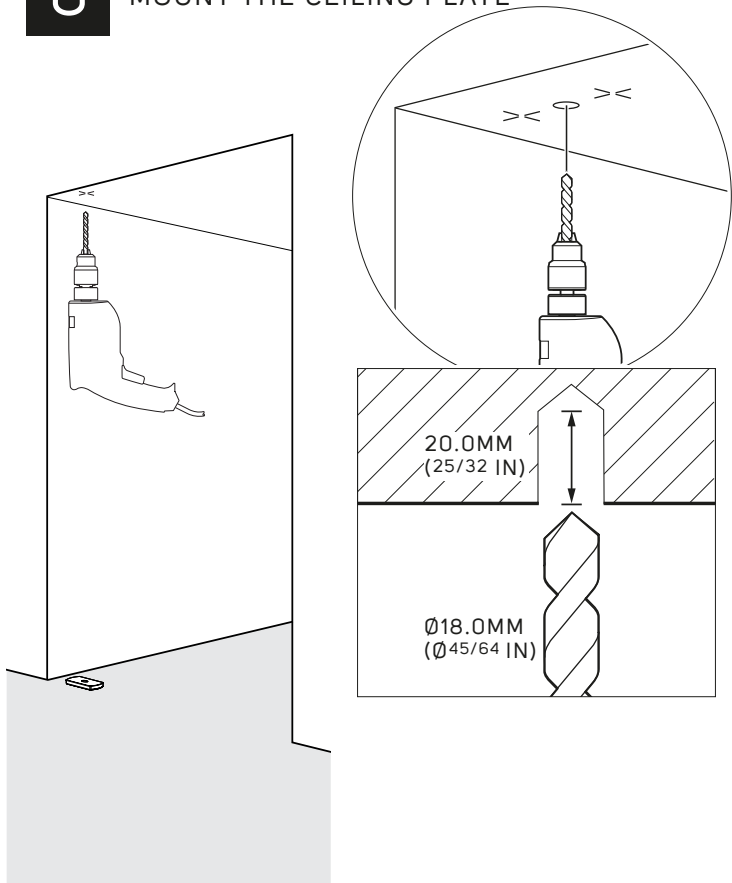


8 MOUNT THE DOOR

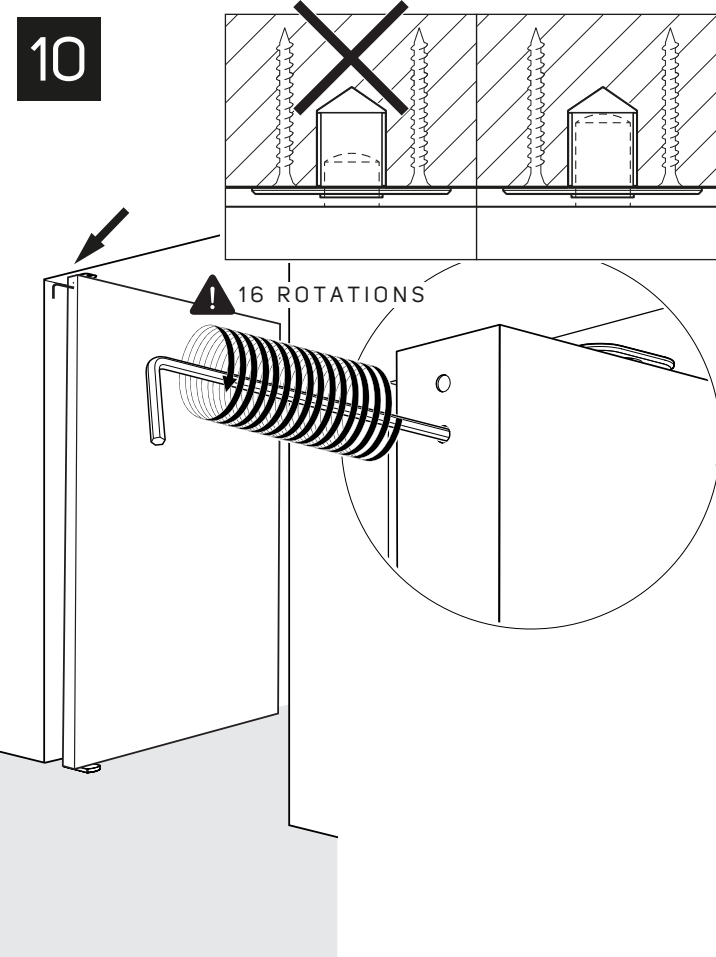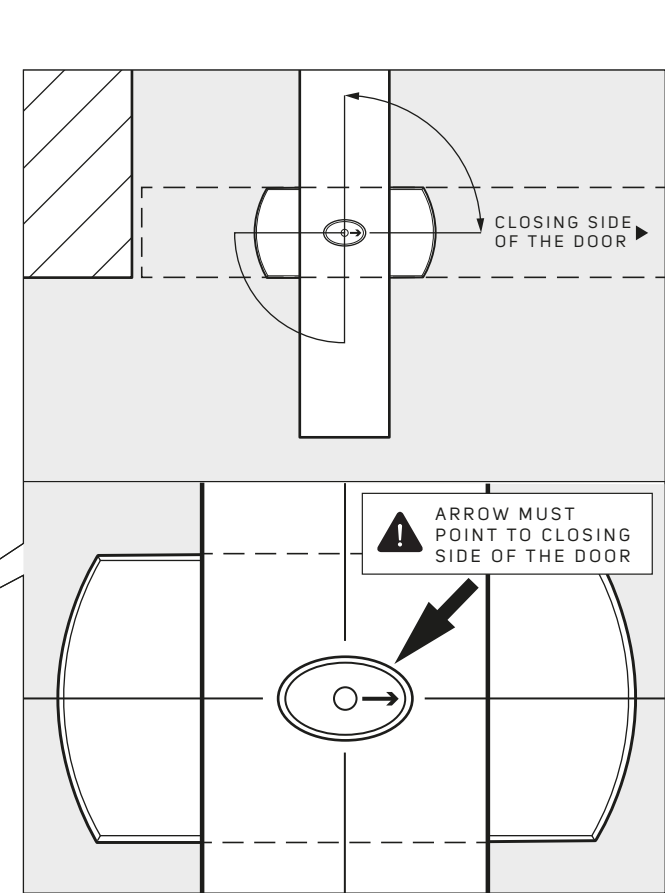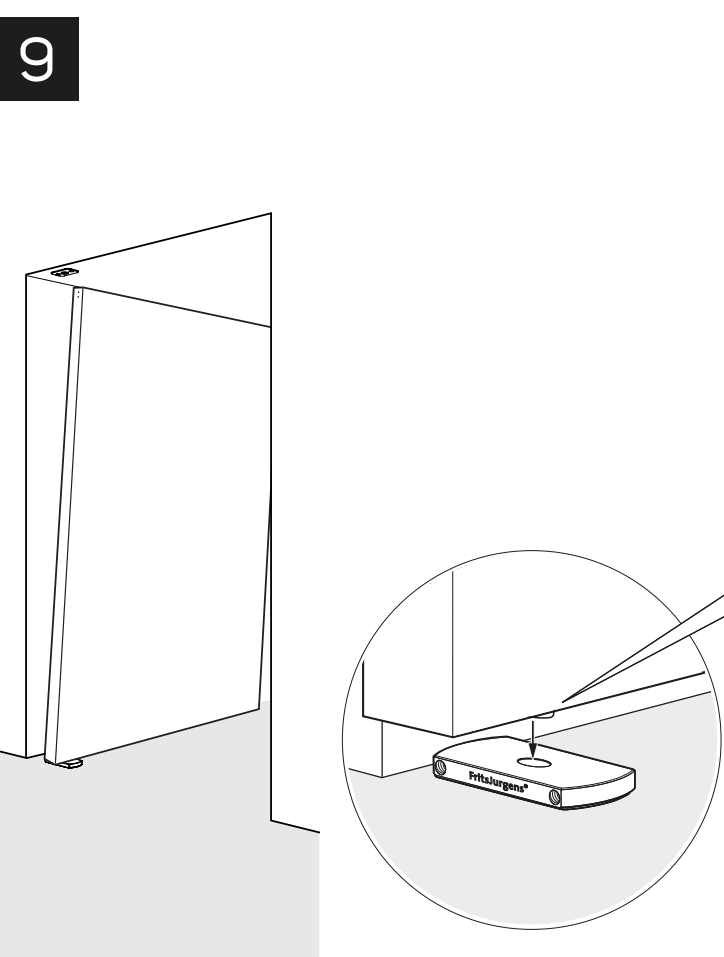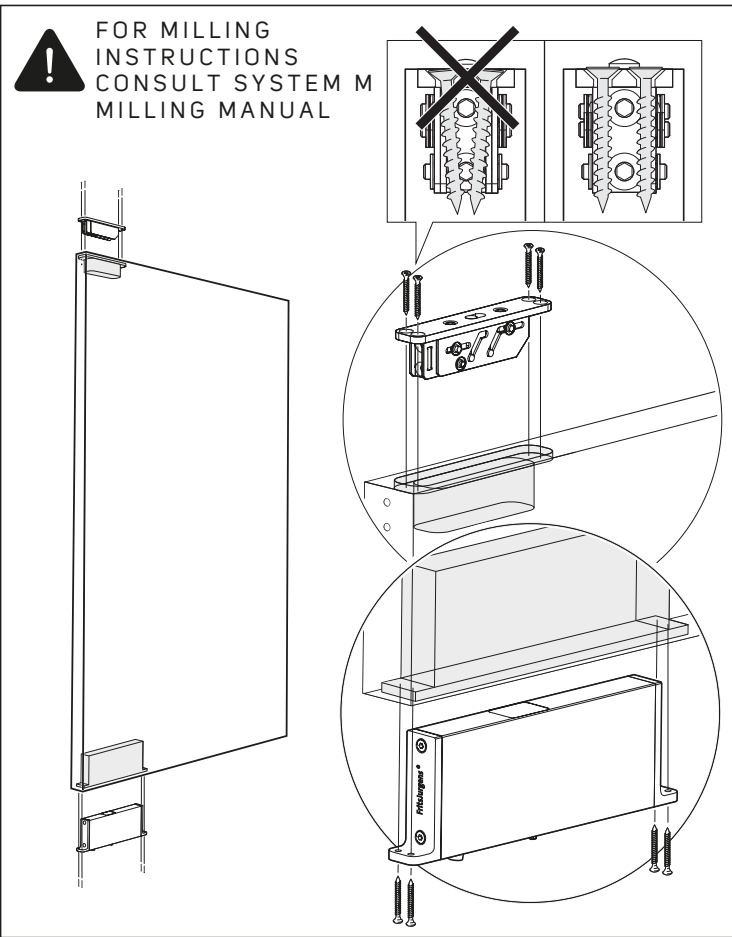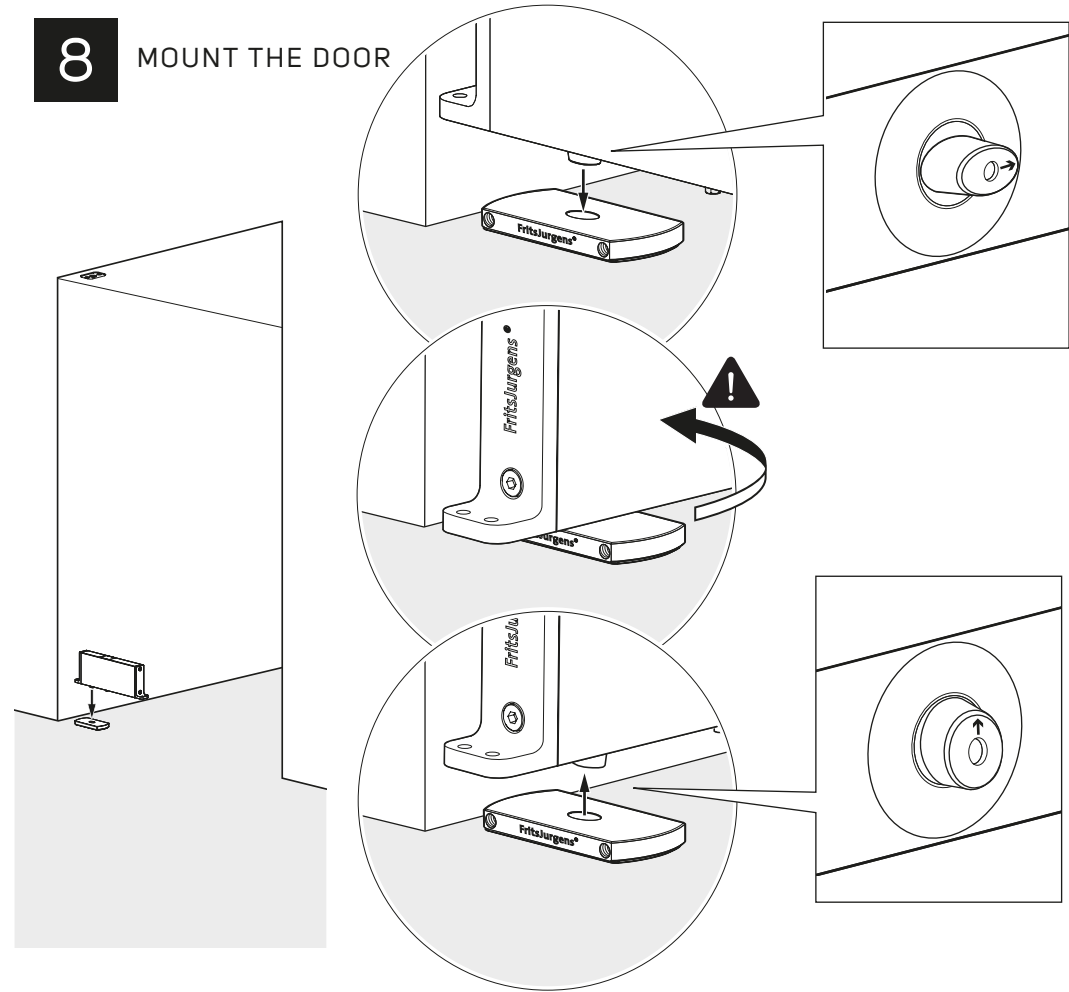

A FINETUNE THE RADIAL POSITION

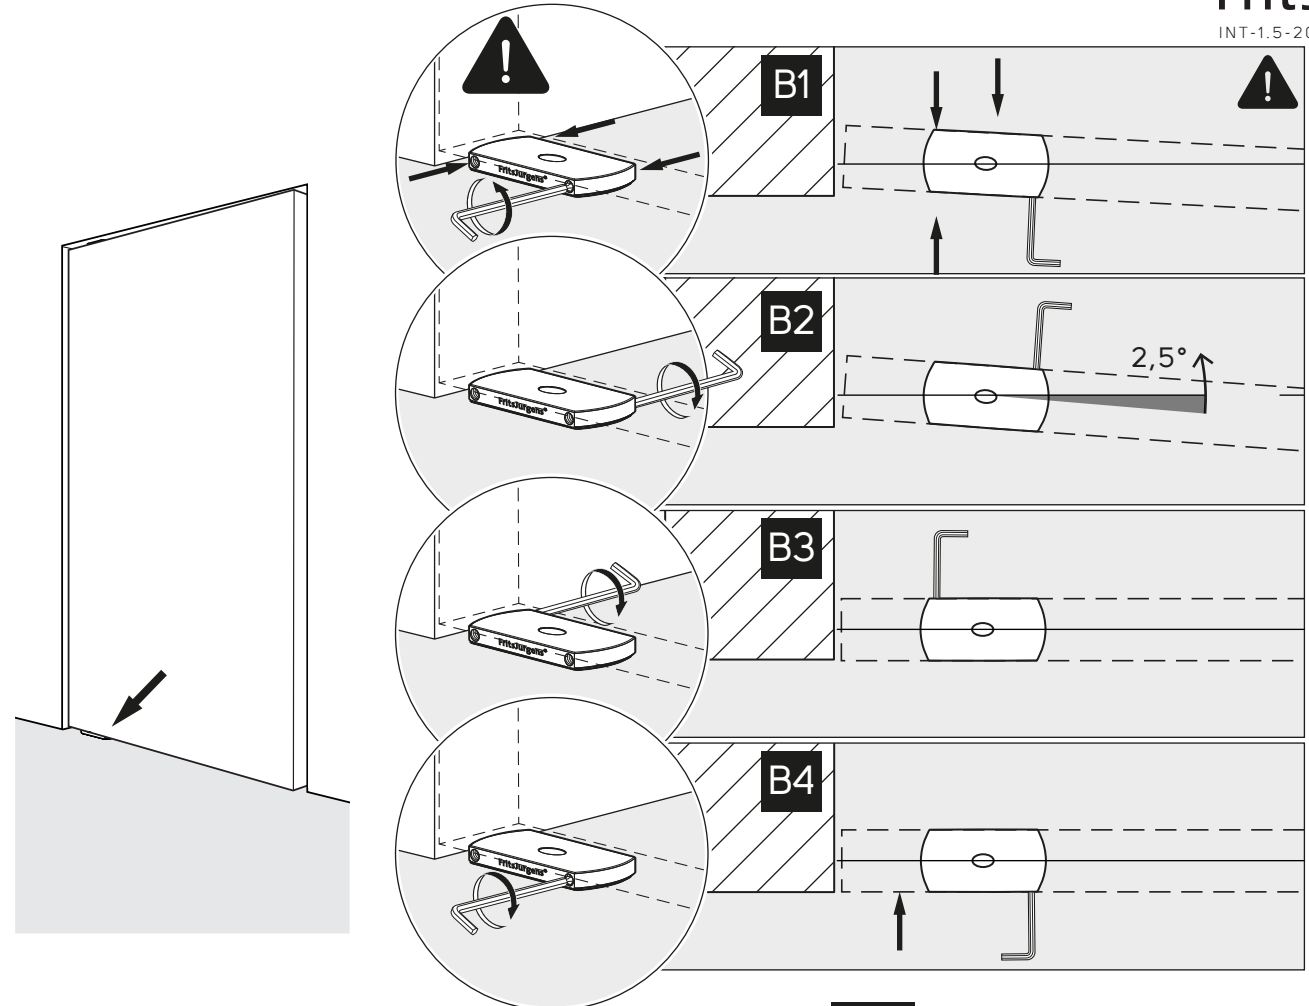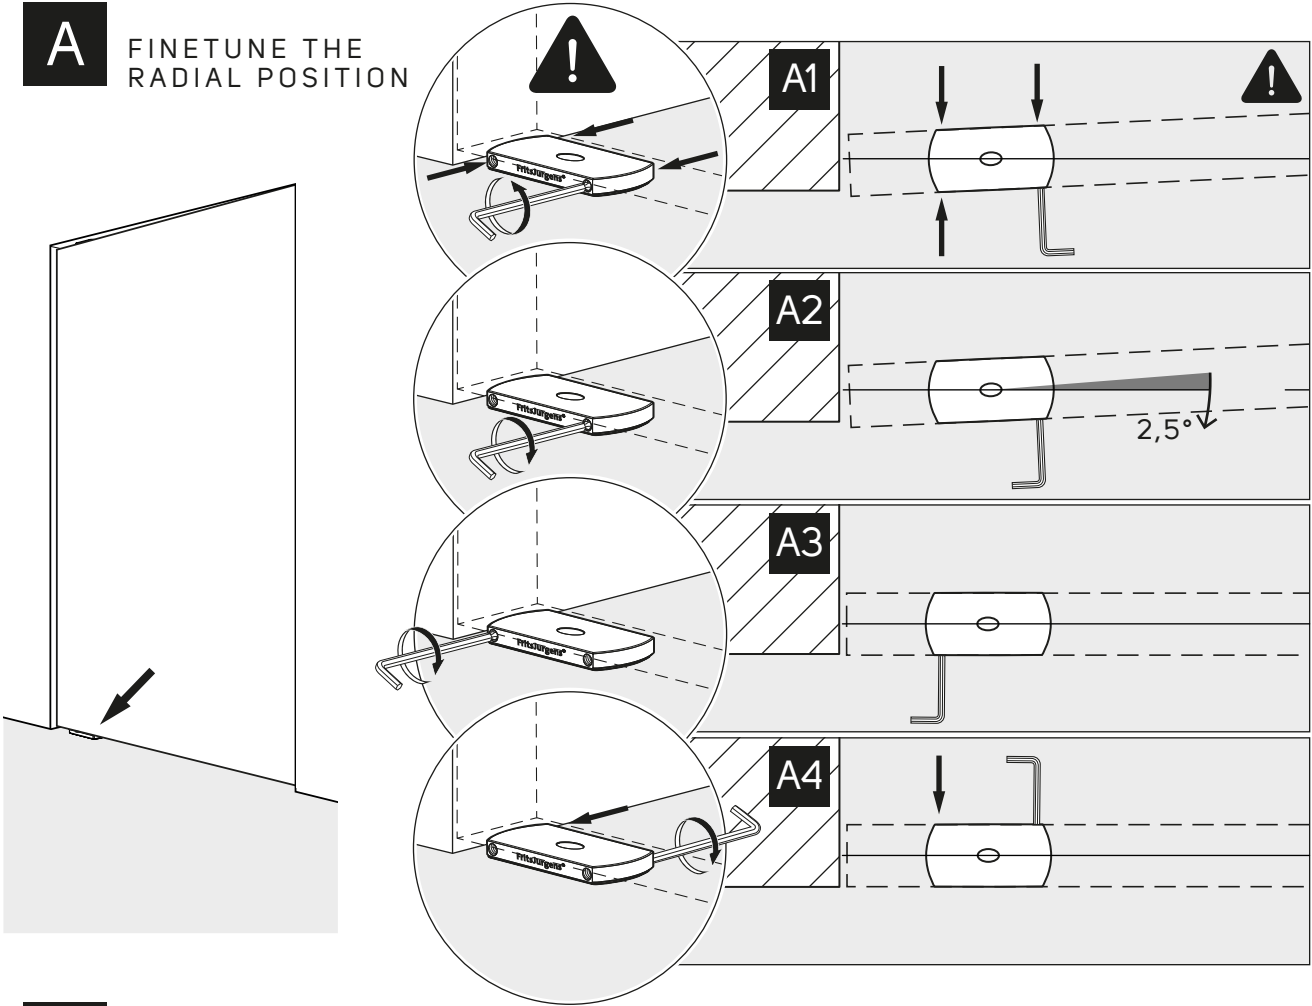

B FINETUNE THE CLOSING SEAM

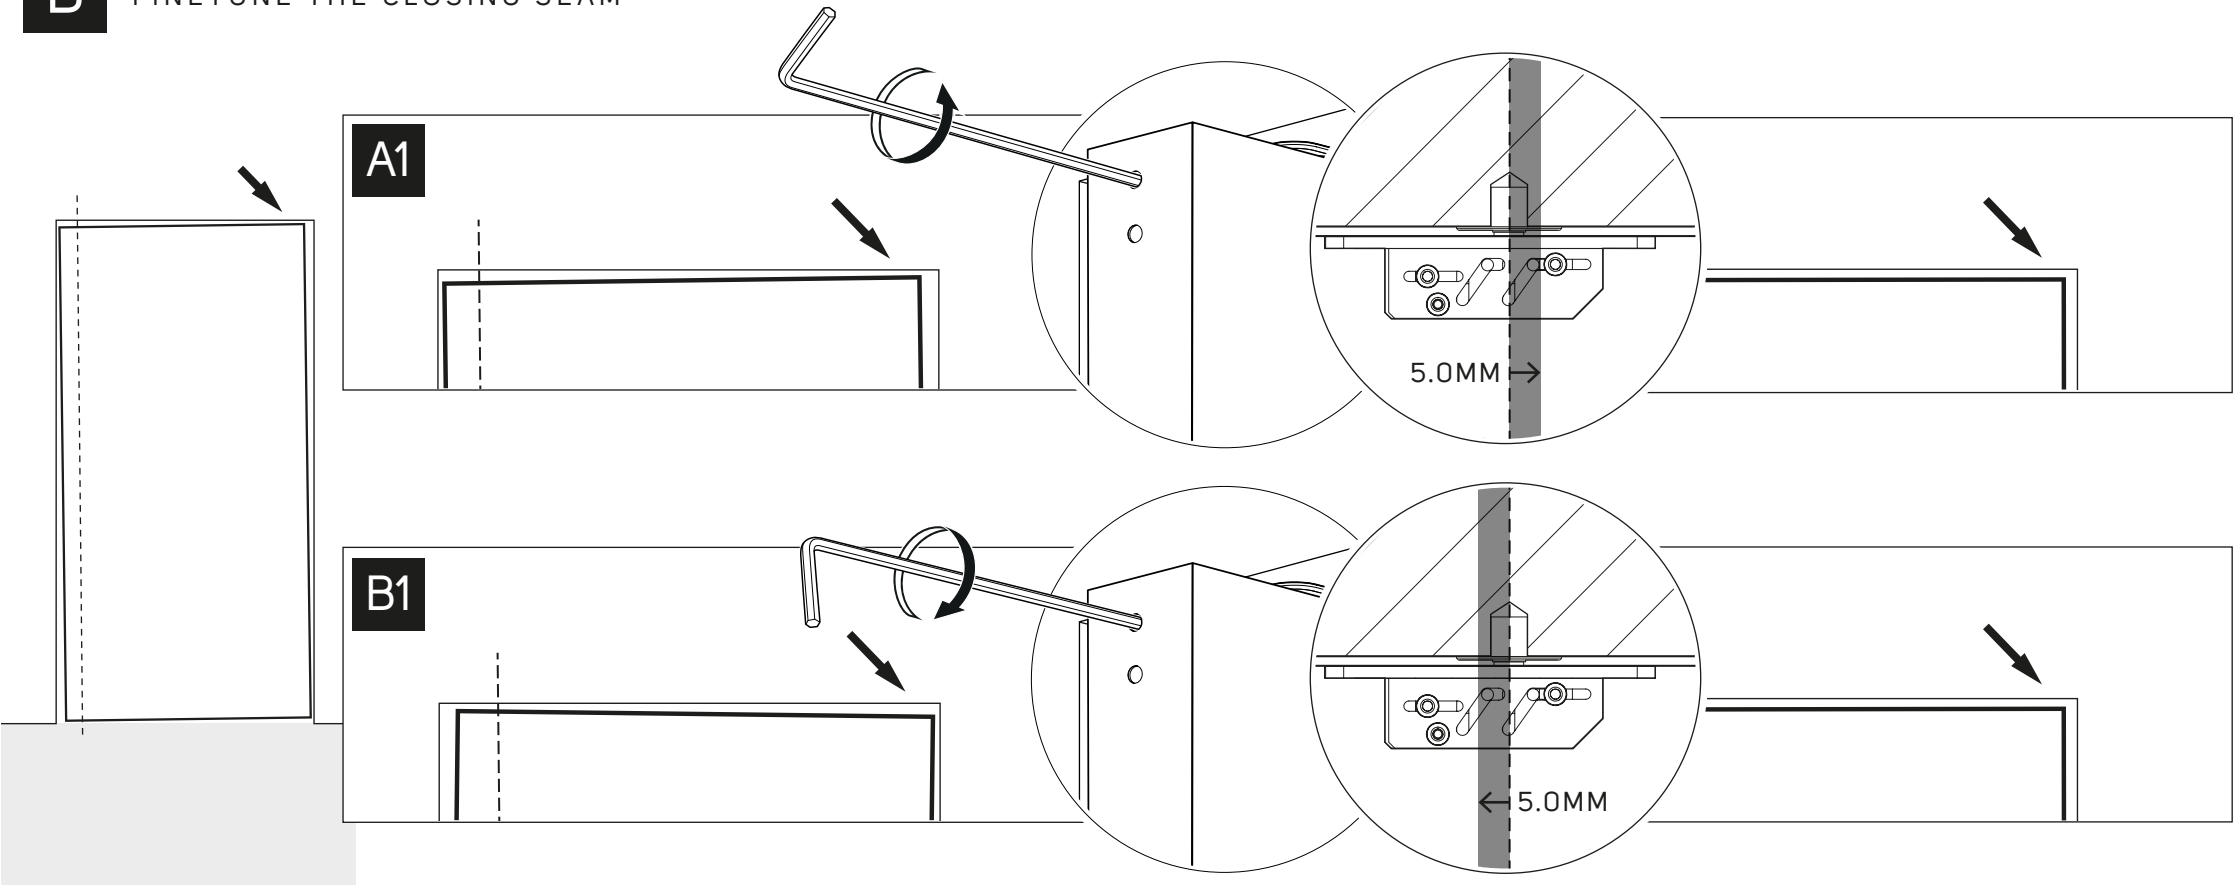

C FINETUNE THE MOVEMENT

