



3D Concealed Hinge BAC1030 Technical Data

Fully Adjustable Stainless Steel: Max 85kg




Timber Rebate Measurements

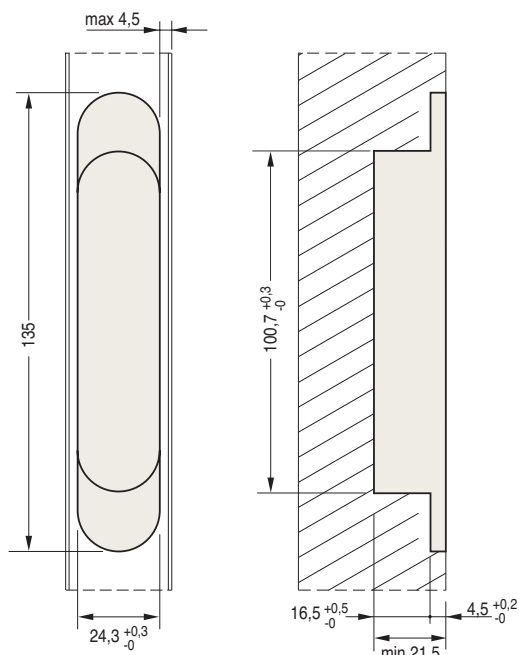


Only 21.5mm rebate
ideal for thin jambs

Hinge Measurements

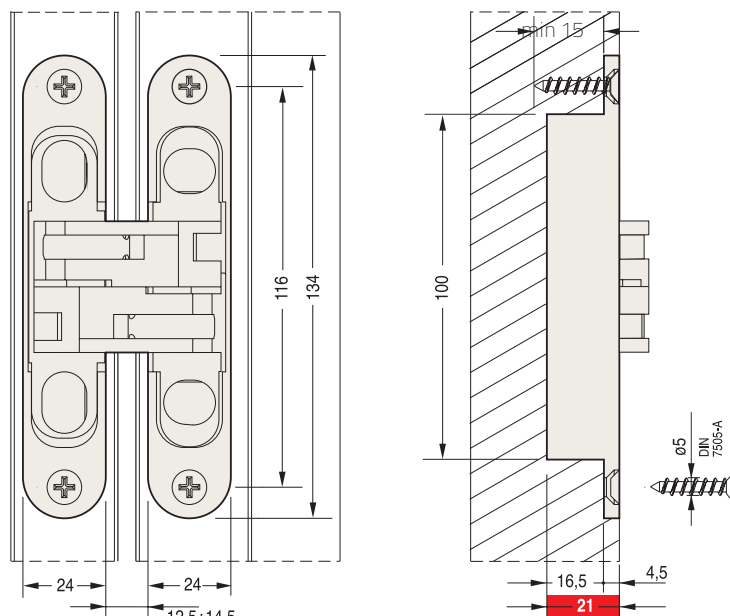


Only 21mm deep

BAC1030 Diagrams

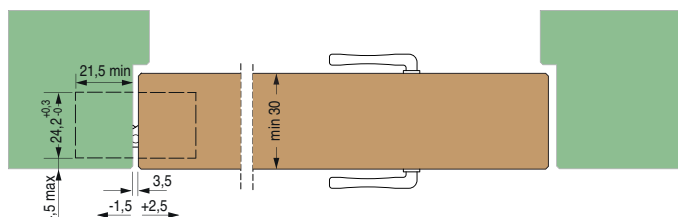


Hinge rebated 4.5mm max from edge of door and jamb on opening side

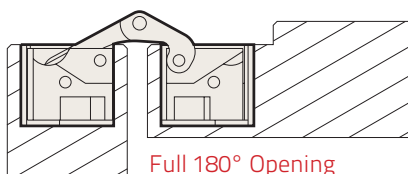

Full 180° Opening

BAC1030 Quick Facts

- 3D adjustable
- CEAM quick release system
- 100% Made in Italy for over 50 years
- Suitable for high frequency opening doors
- Jig & router template available for easy of installation
- Suitable for internal & external (under cover) locations
- Suitable for residential, commercial & industrial locations




Min 2mm gap between door and jamb

Note: if being used with a door closer see page 36.

No. of Hinges based on Door Width & Weight

For doors over 2100mm tall, see page 36

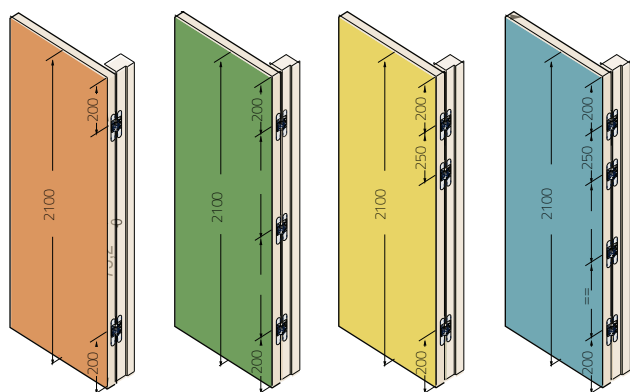

- 2 hinges per door
- 3 asymmetrical hinges per door
- 3 symmetrical hinges per door
- 4 hinges per door

