

A minimalist interior space with concrete walls and a large white panel. A small, modern, metallic chair is positioned on the left. The floor is made of large, light-colored tiles. The lighting is soft and even, highlighting the textures of the concrete and the smooth surface of the white panel.

SYSTEM M

MOUNTING MANUAL

FritsJurgens®





TABLE OF CONTENTS


MOUNTING MANUAL SYSTEM M



04	Components
06	Technical drawings
09	Milling drawings
10	Mounting manual
20	Closing seam setting
22	Setting the radial position
23	Setting the closing speed



PRECAUTIONS FOR HANDLING




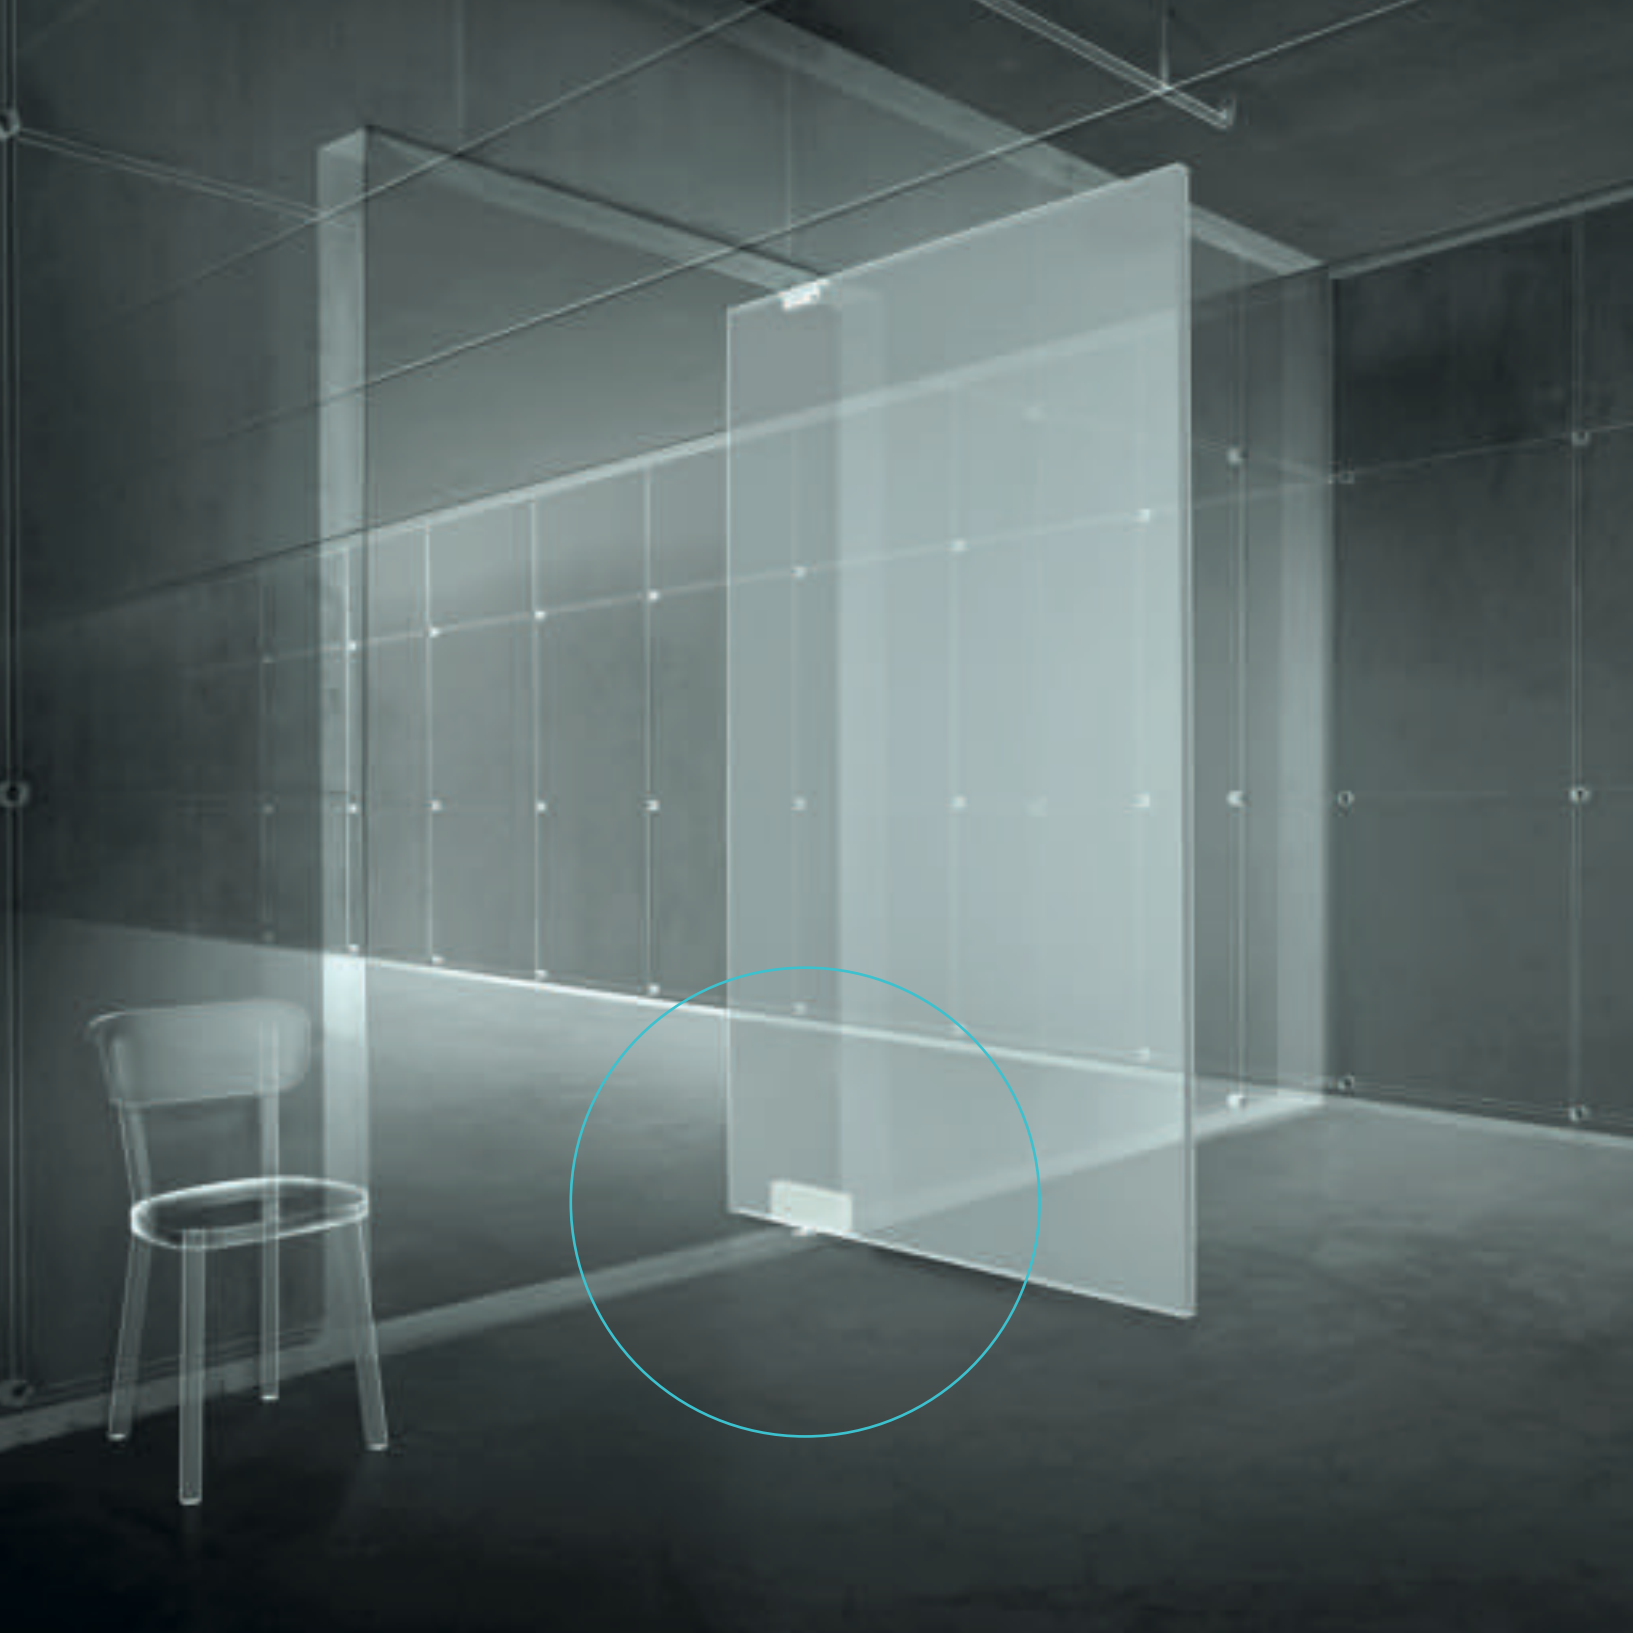

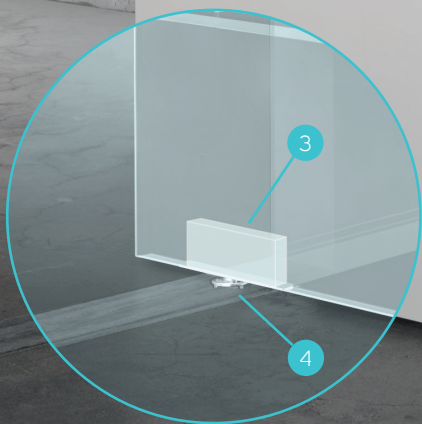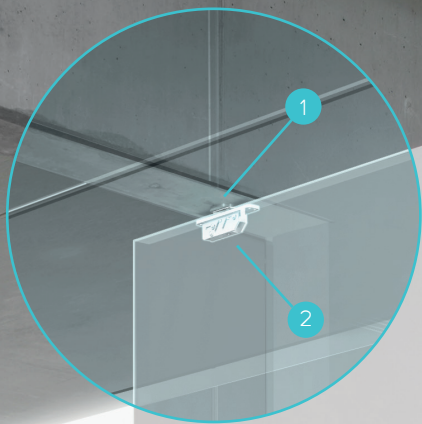

SYSTEM M COMPONENTS

1 CEILING PLATE



2 TOP PIVOT



3 SYSTEM M



4 FLOORPLATE



A MOUNTING PACKAGE

- A. Allen wrench
- B. Fitting template
- C. Fitting adhesive
- D. Adjustment spanner


B SCREWS

- A. Screw 6x60 RVS
2x - for fitting ceiling plate
- B. Screw 4x50 RVS
8x - for fitting System M and top pivot



SYSTEM M

TECHNICAL DRAWINGS


CEILING PLATE




TOP PIVOT

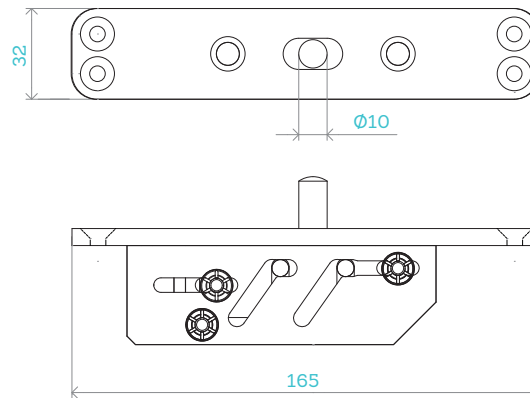

SYSTEM M

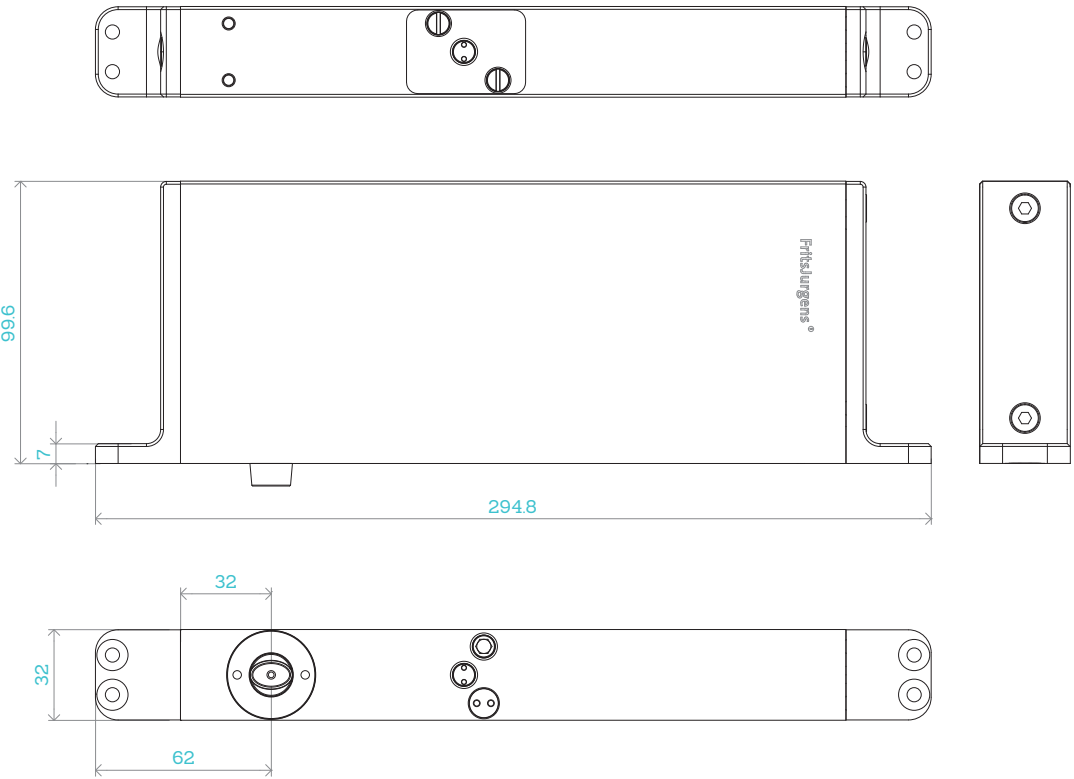

FLOORPLATE




7 All dimensions in mm.


SYSTEM M

MILLING DRAWINGS

TOP PIVOT

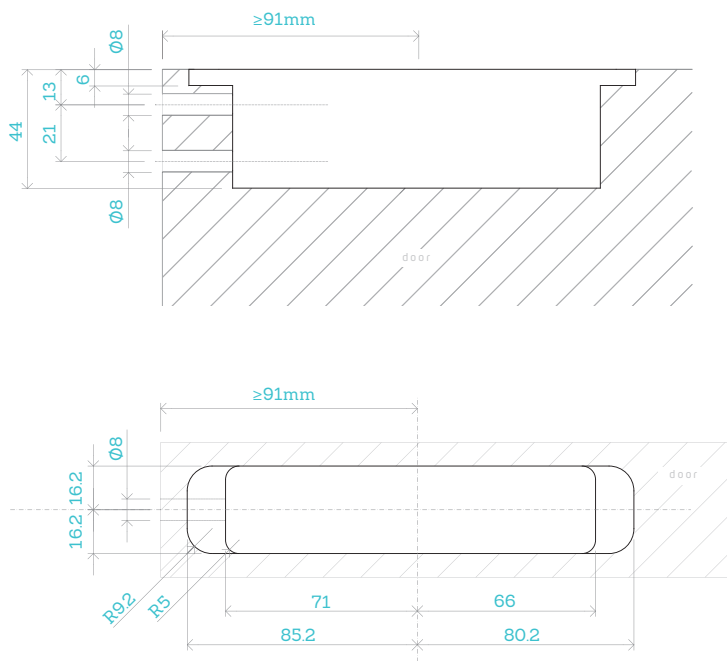


SYSTEM M

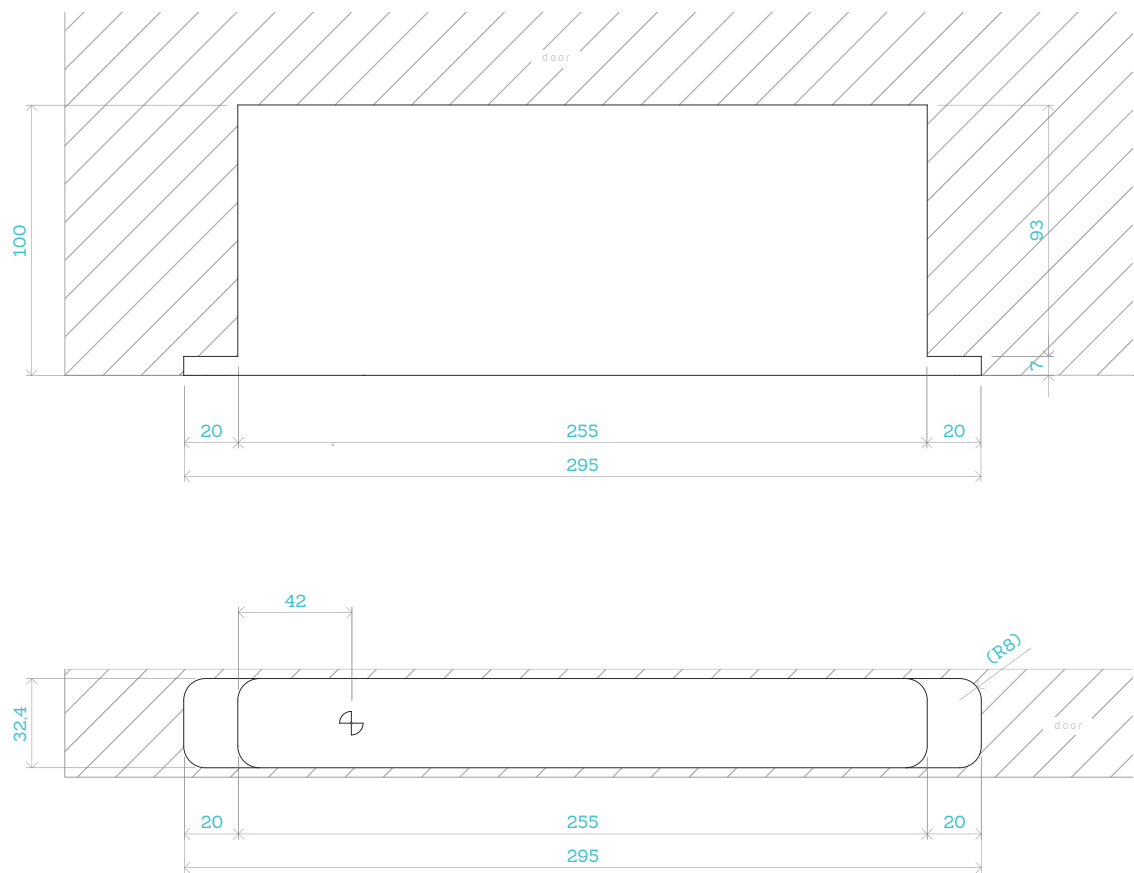


9 All dimensions in mm.

SYSTEM M


MOUNTING MANUAL

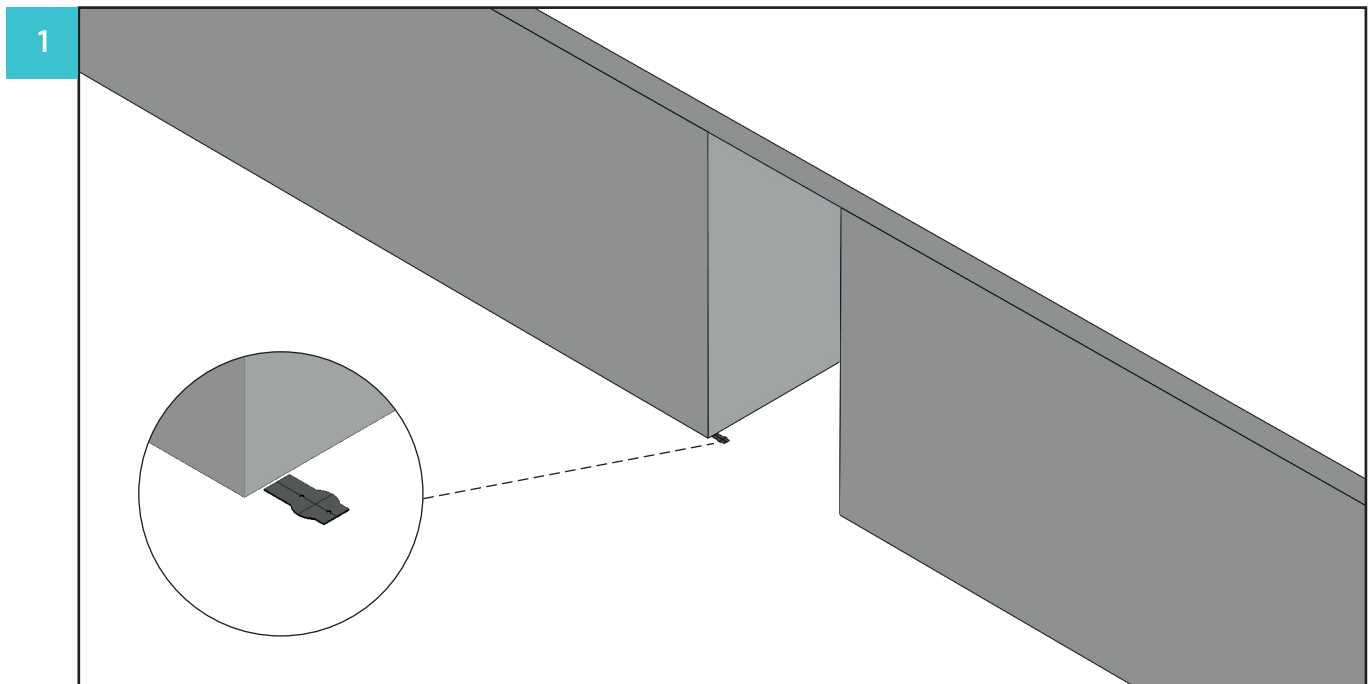

2

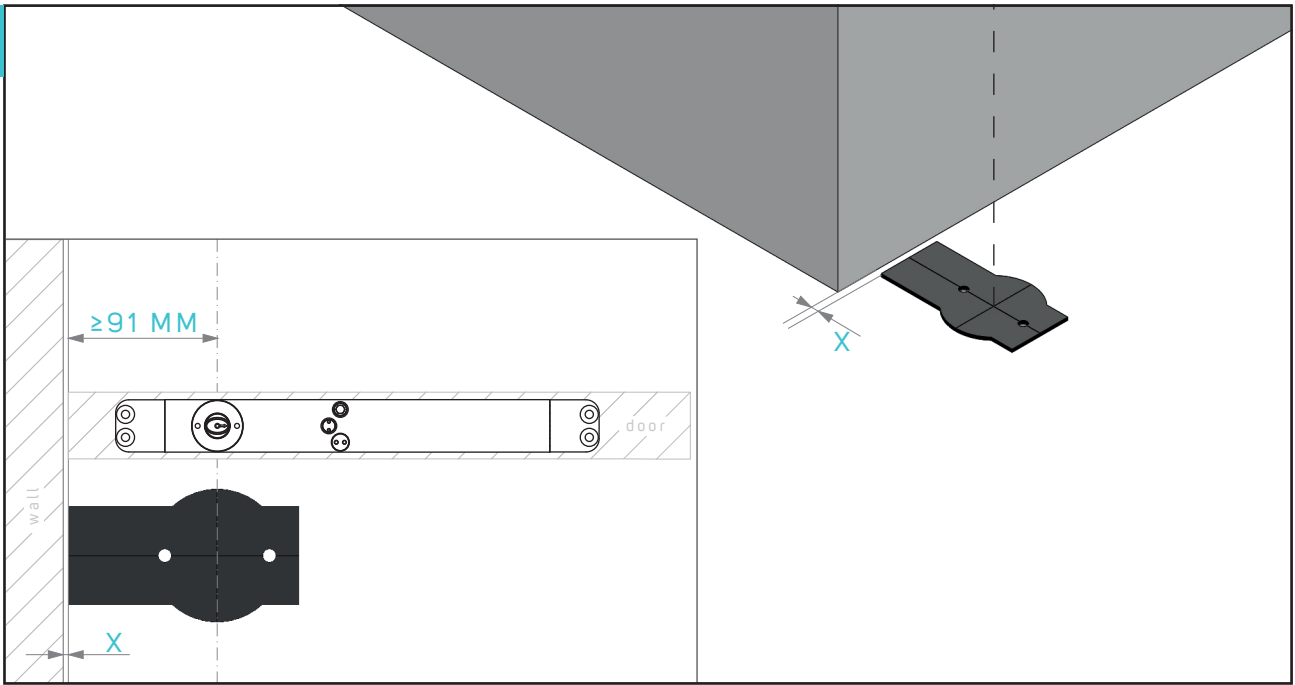


3

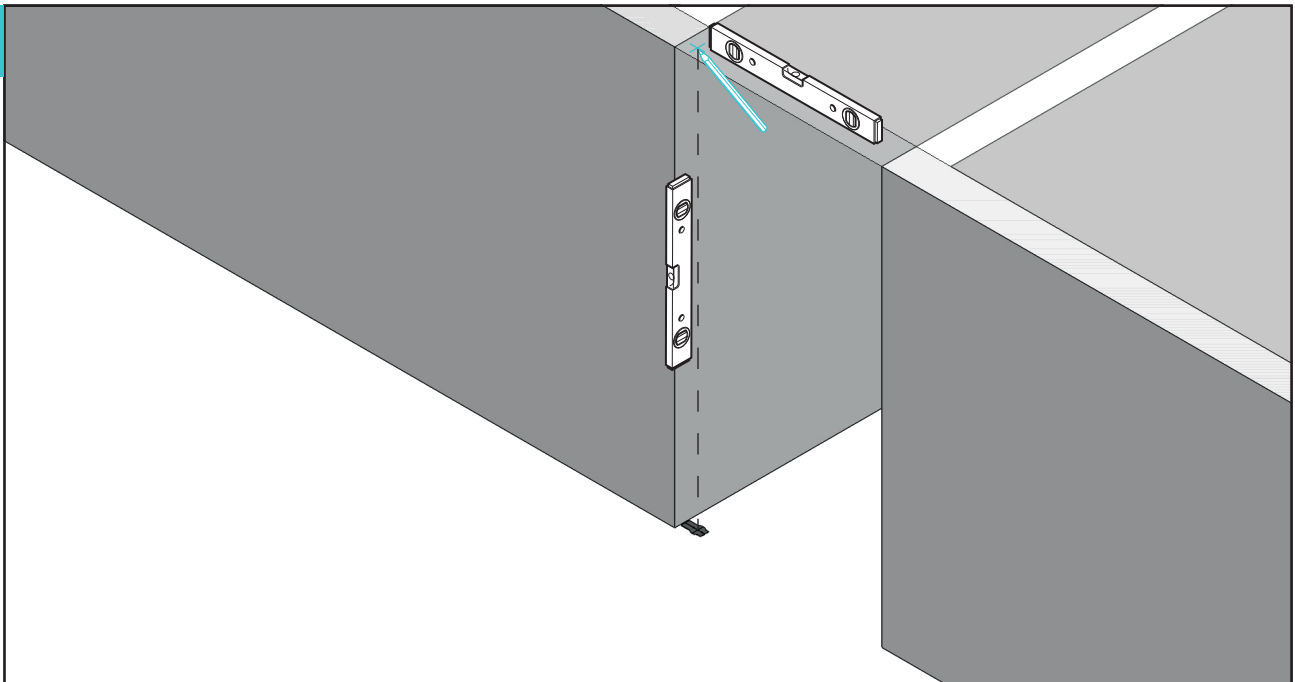


4




WOOD = 7,5 mm
OTHER = 8 mm

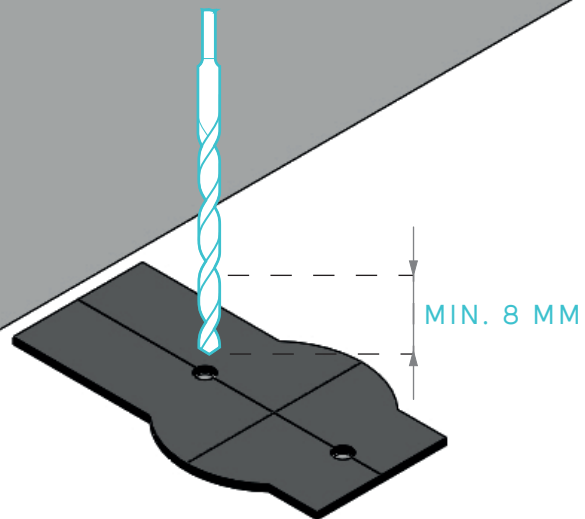


5


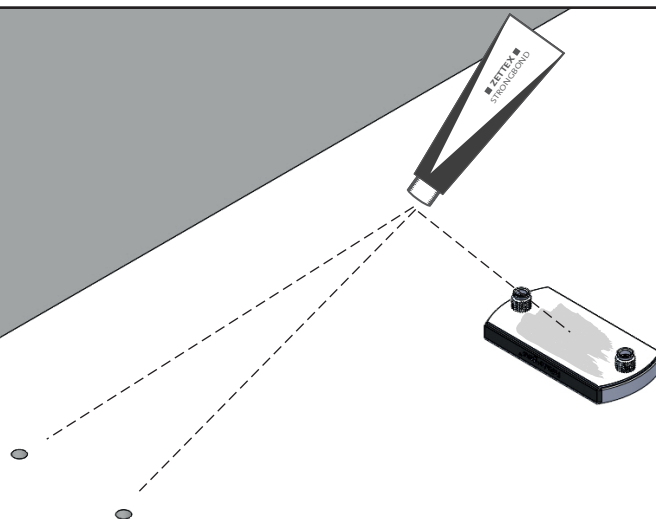



6

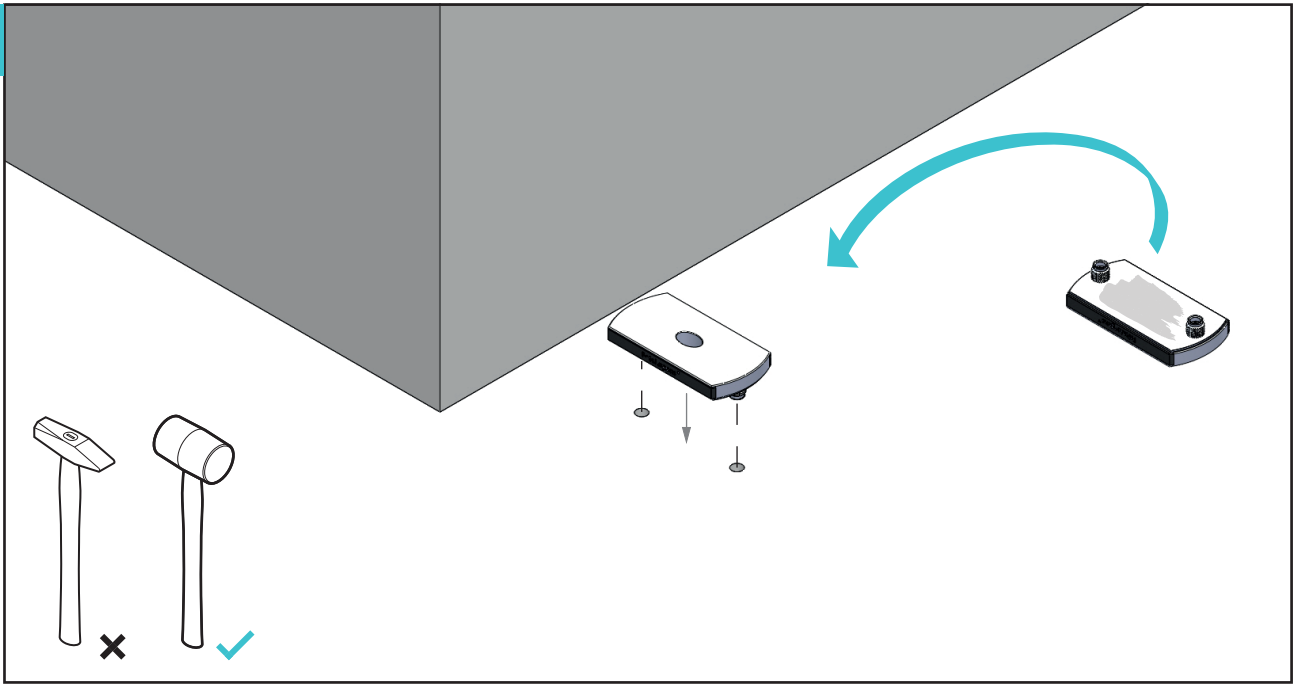

7

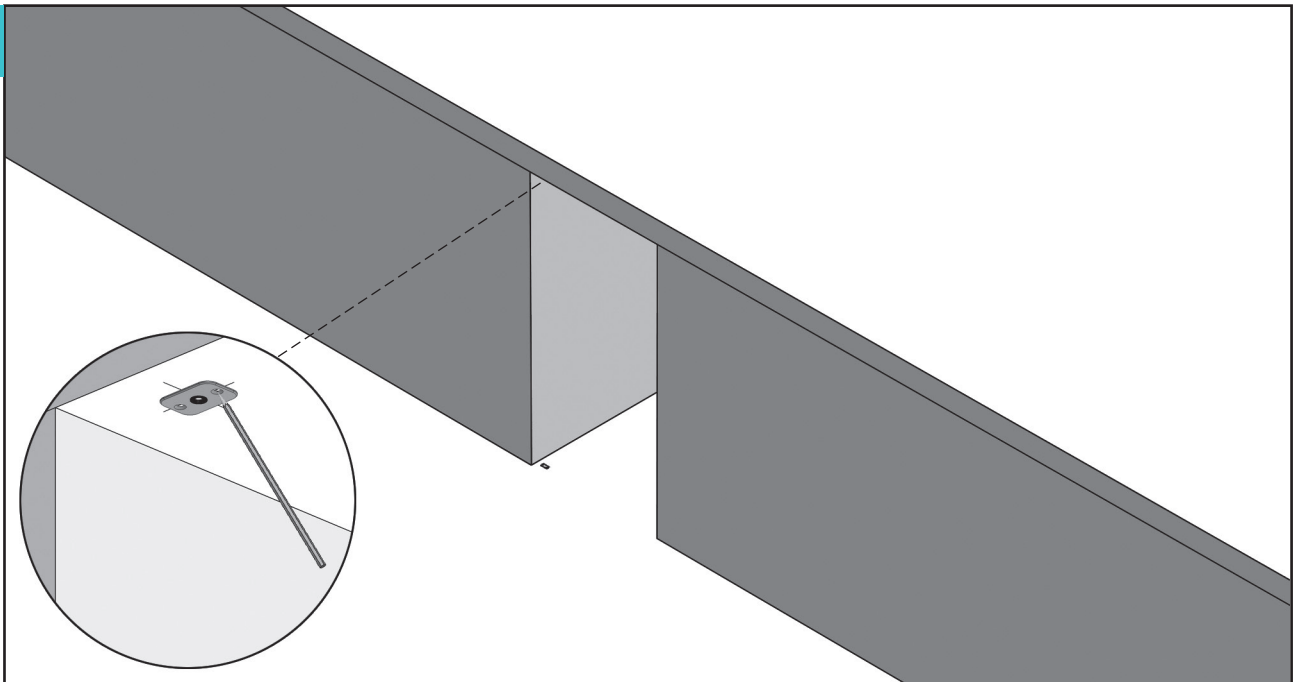

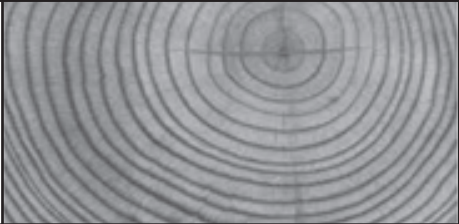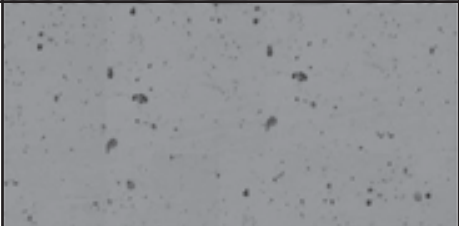
8	WOOD		
	STONE		*  + 
	STEEL		*  M5 * EXCL.

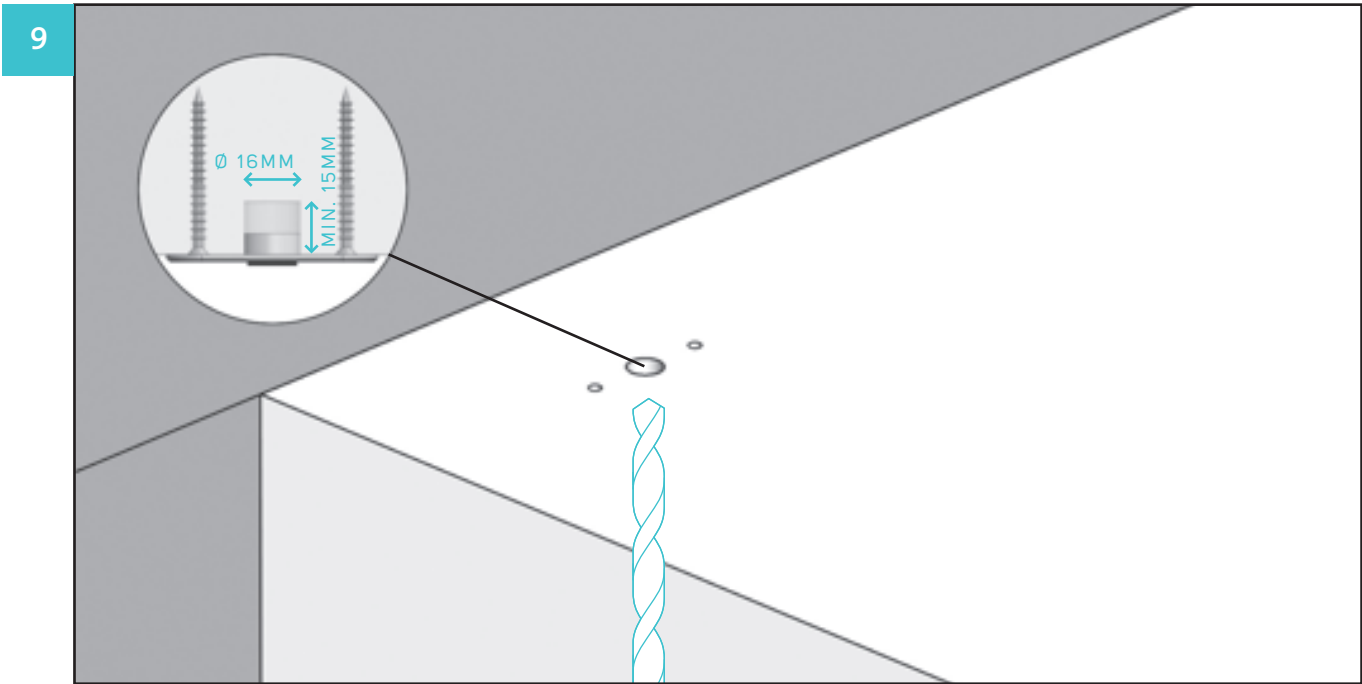


10




11

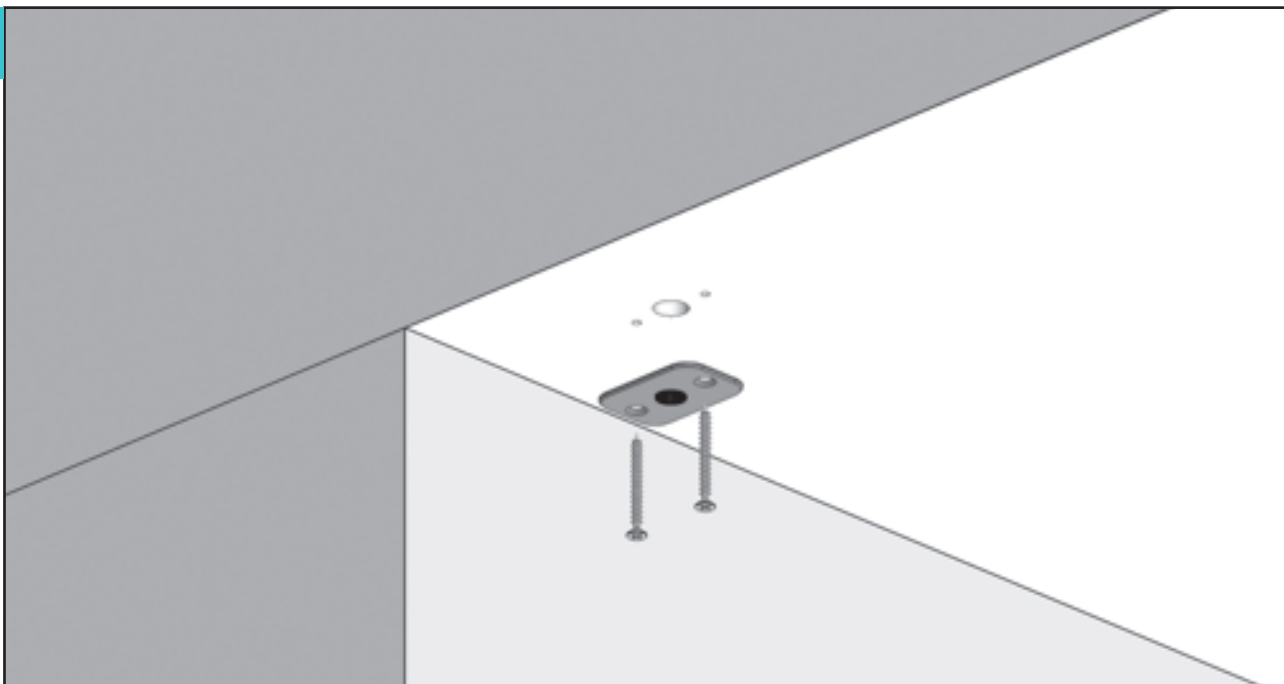


12

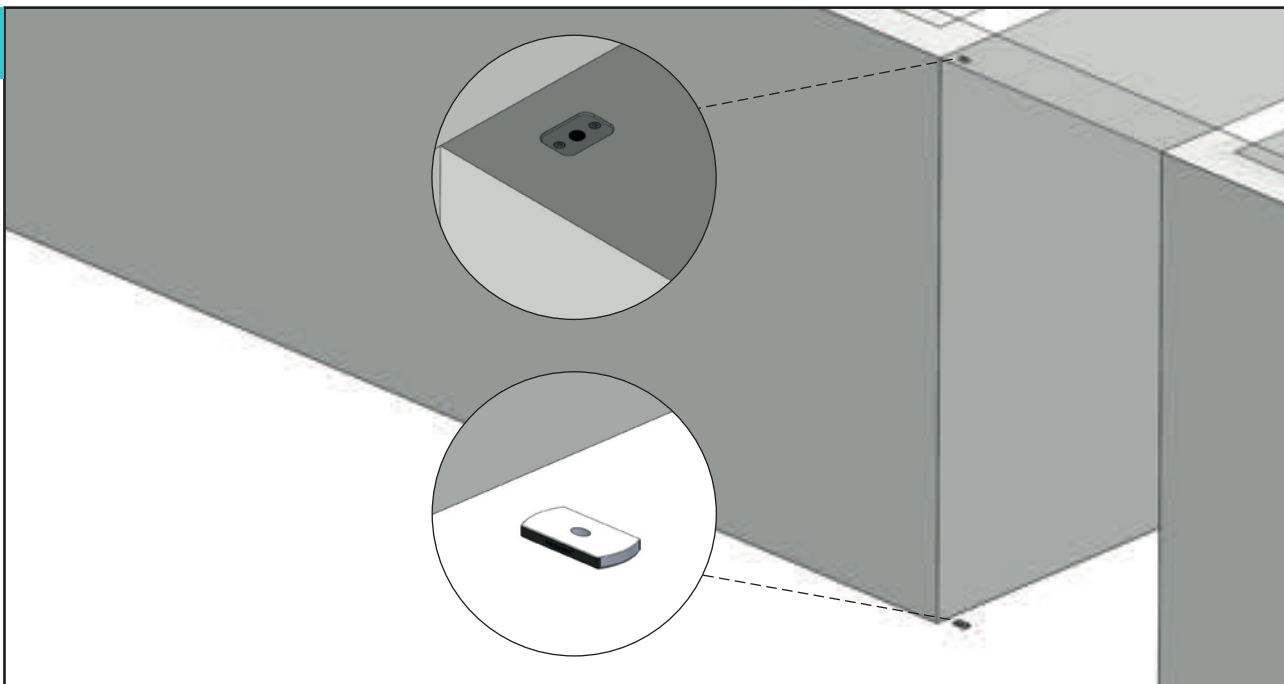


13

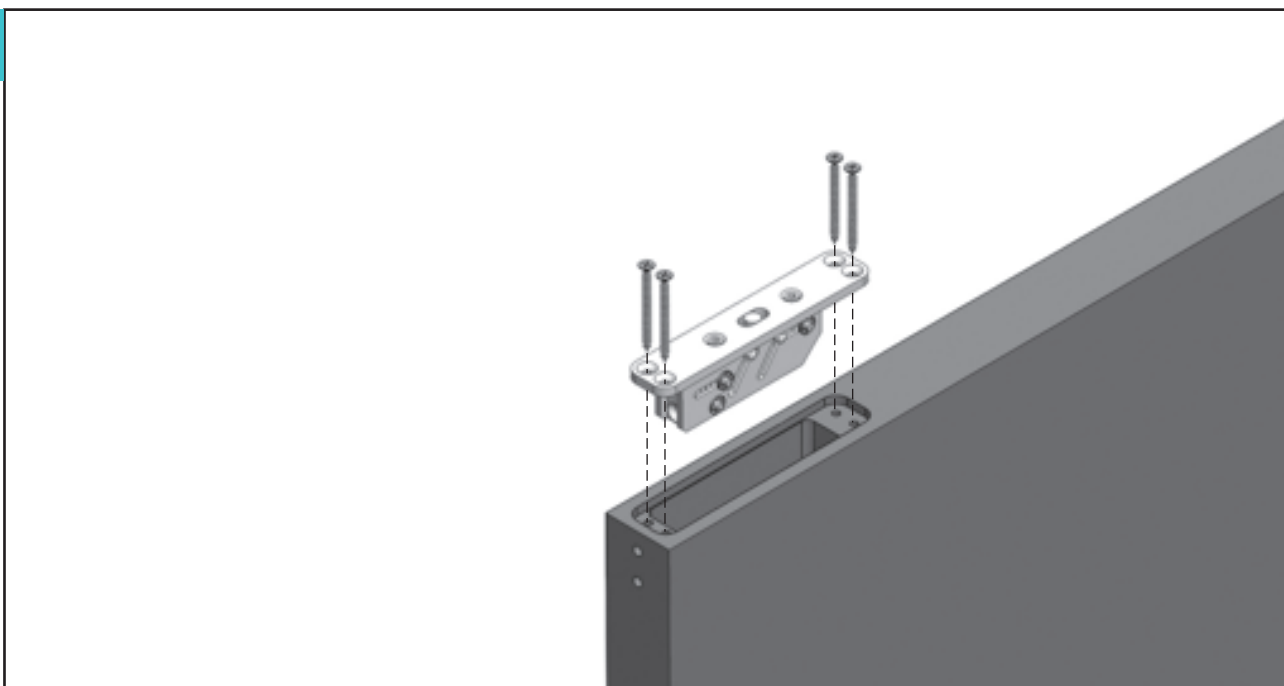


14

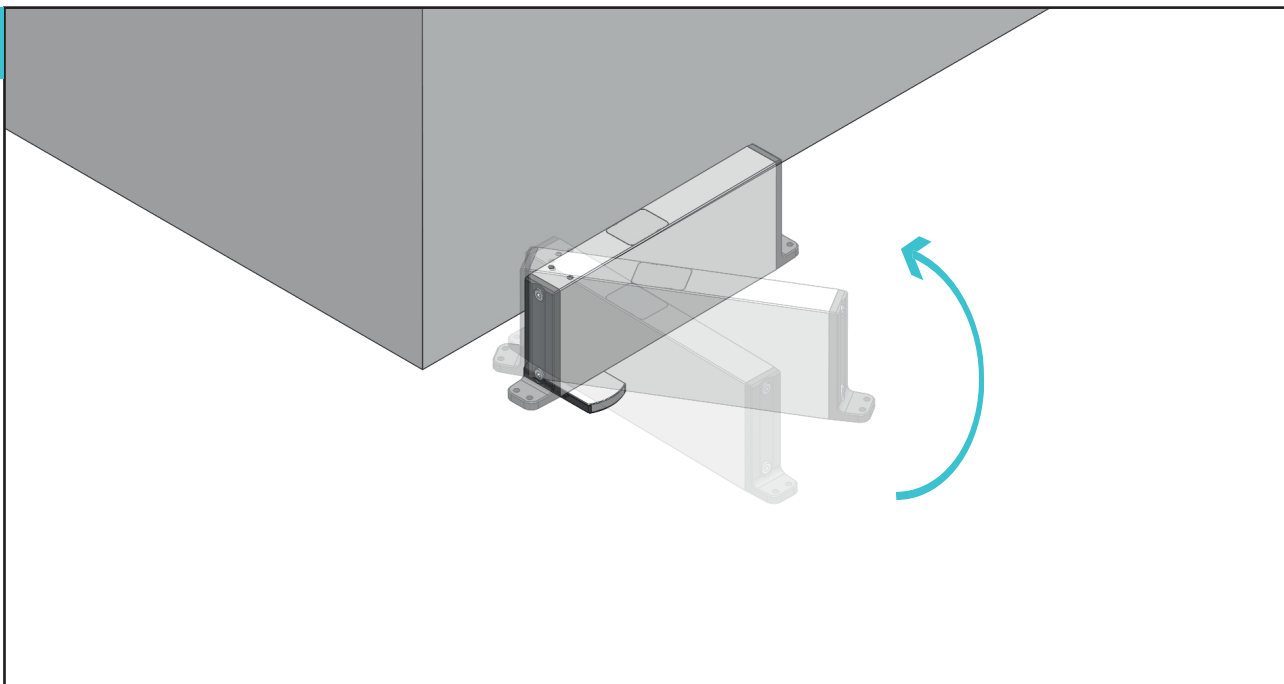


15

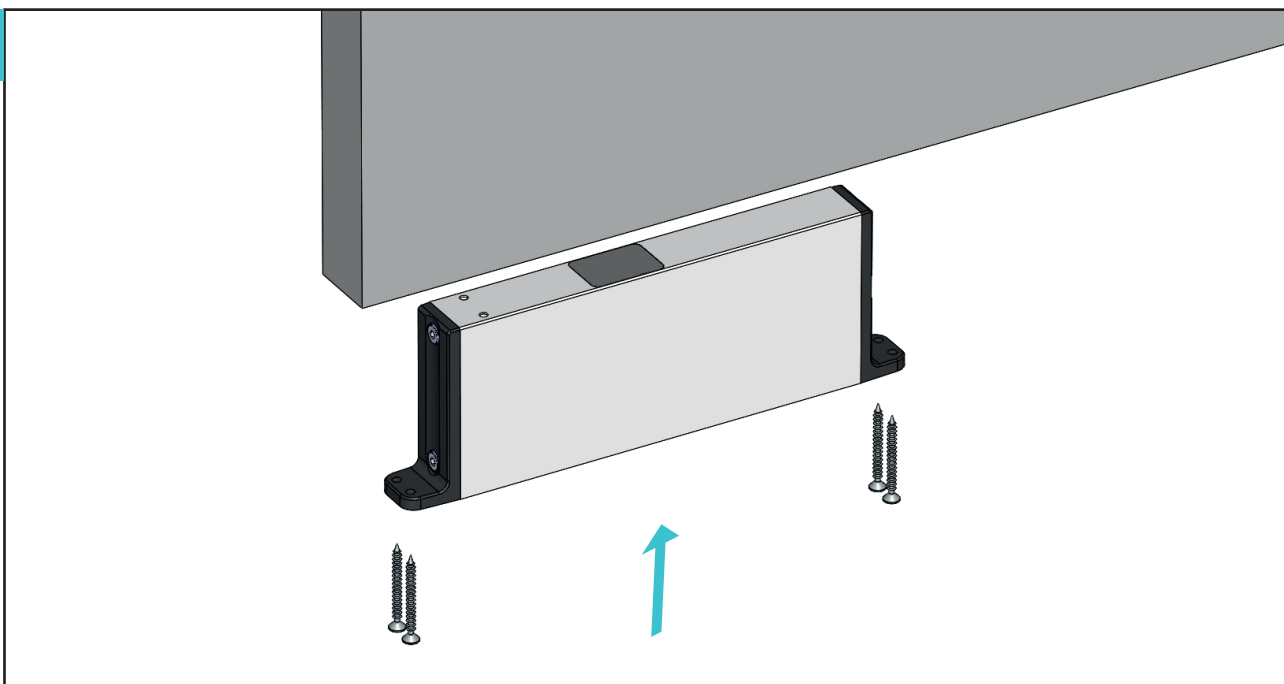


16

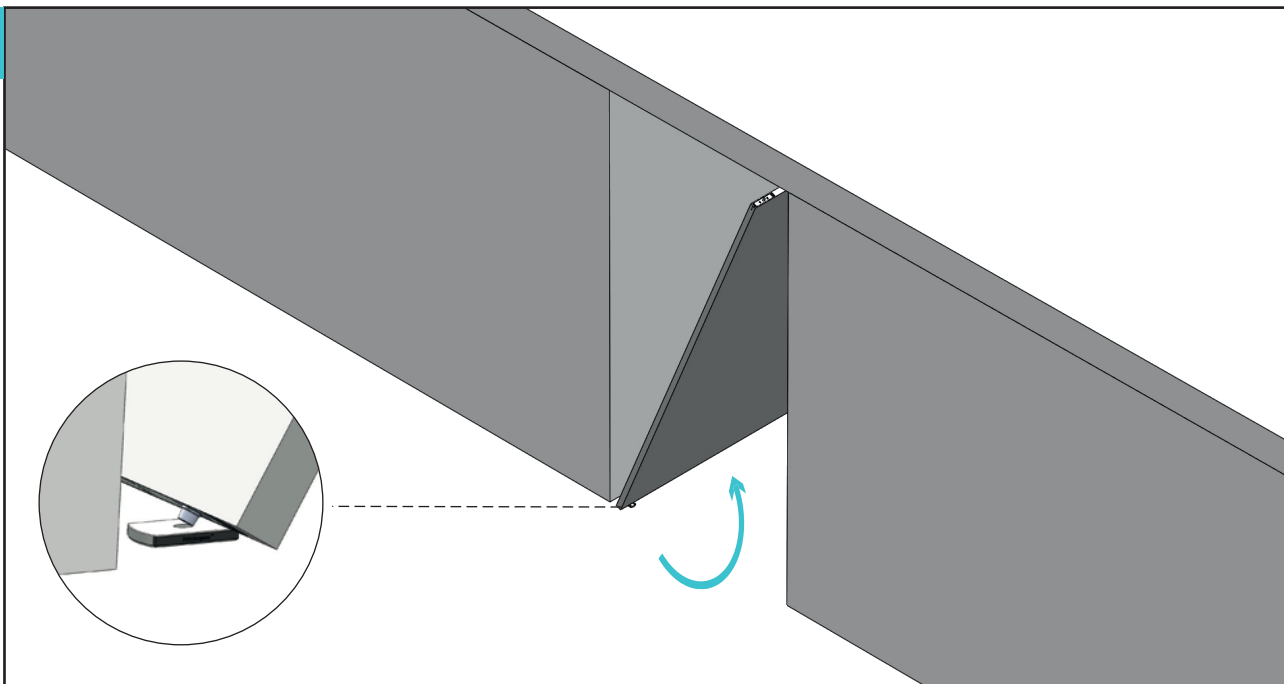

17

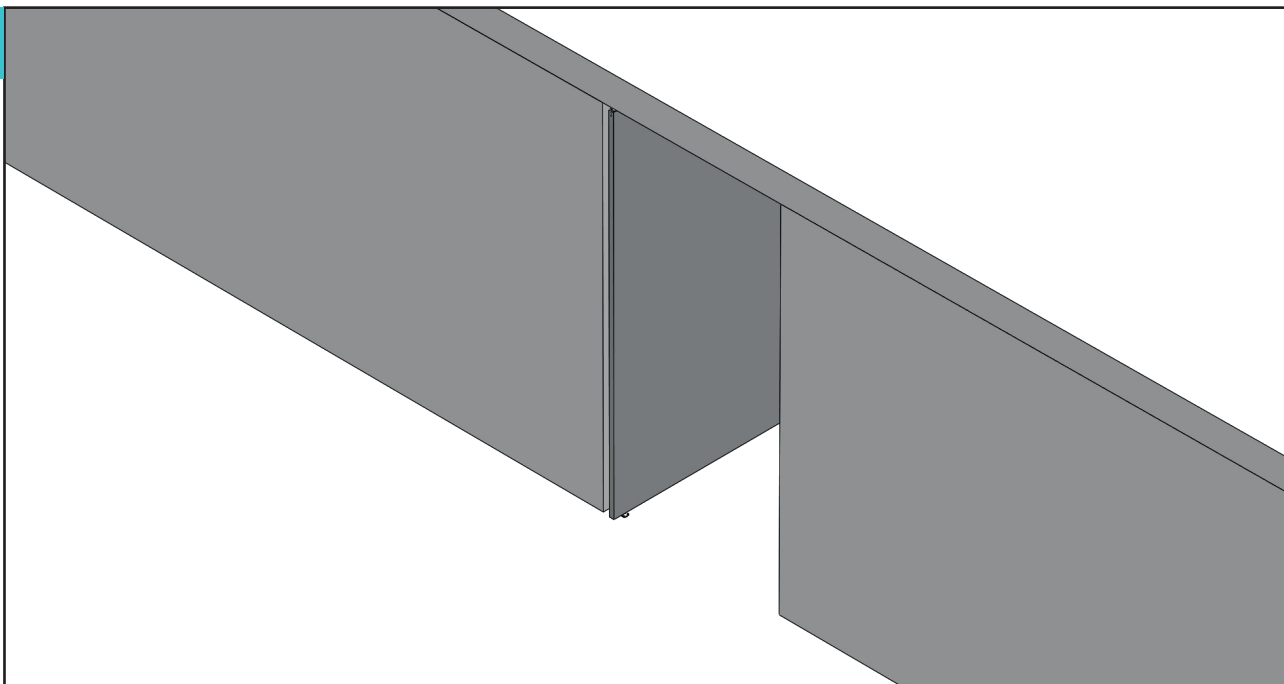



18

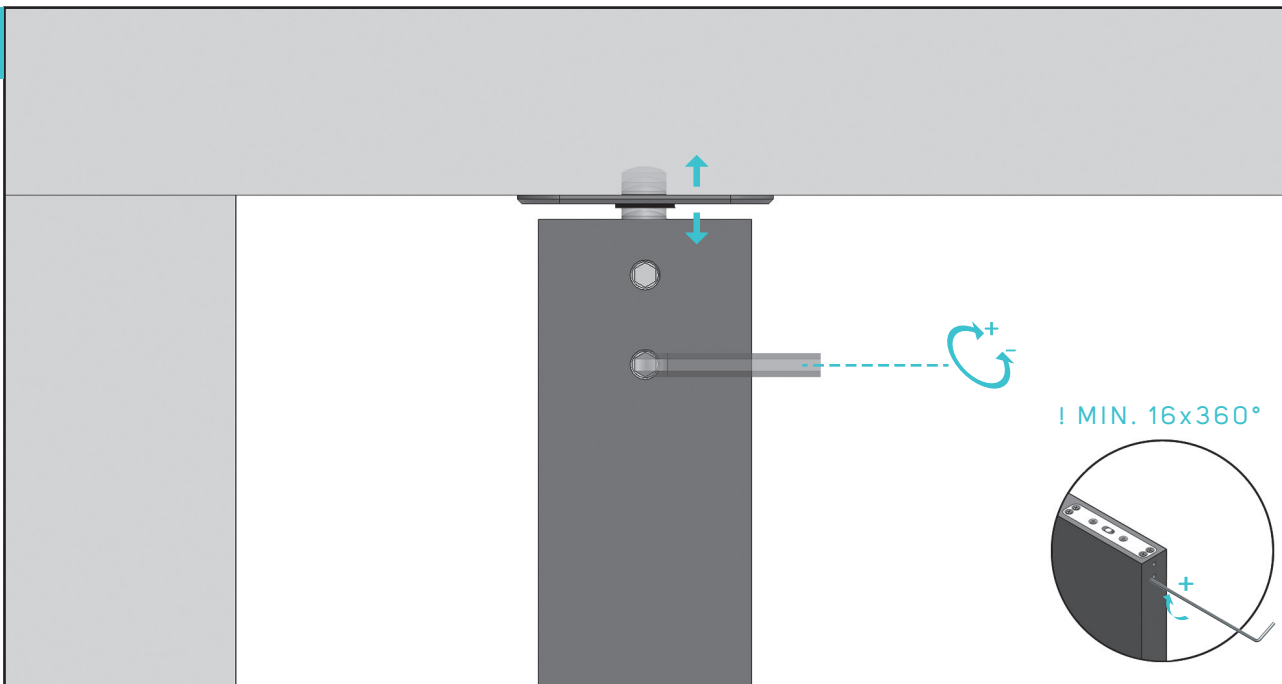

CLOSING SEAM SETTING

The closing seam can be adjusted using a 5mm hex key in the top hole.


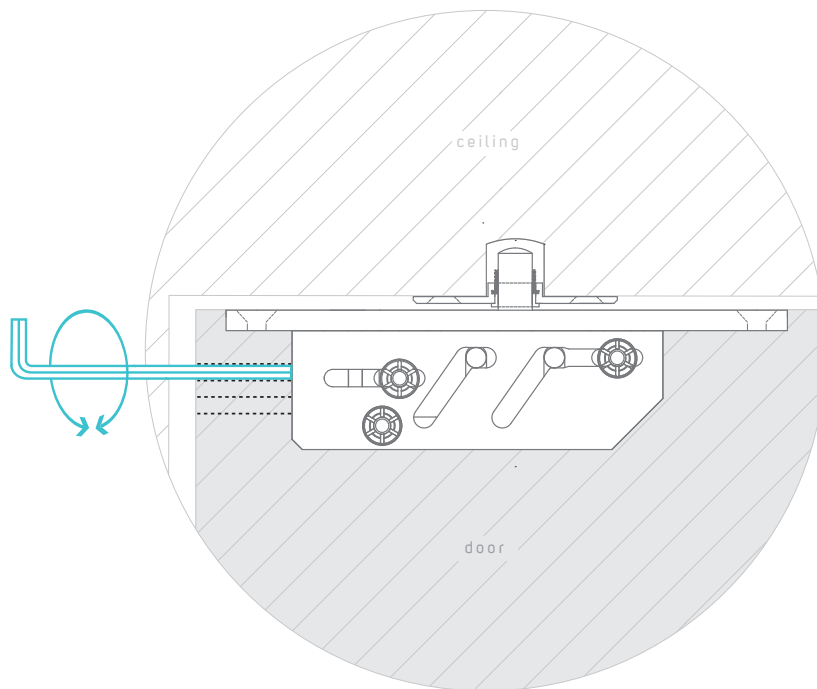


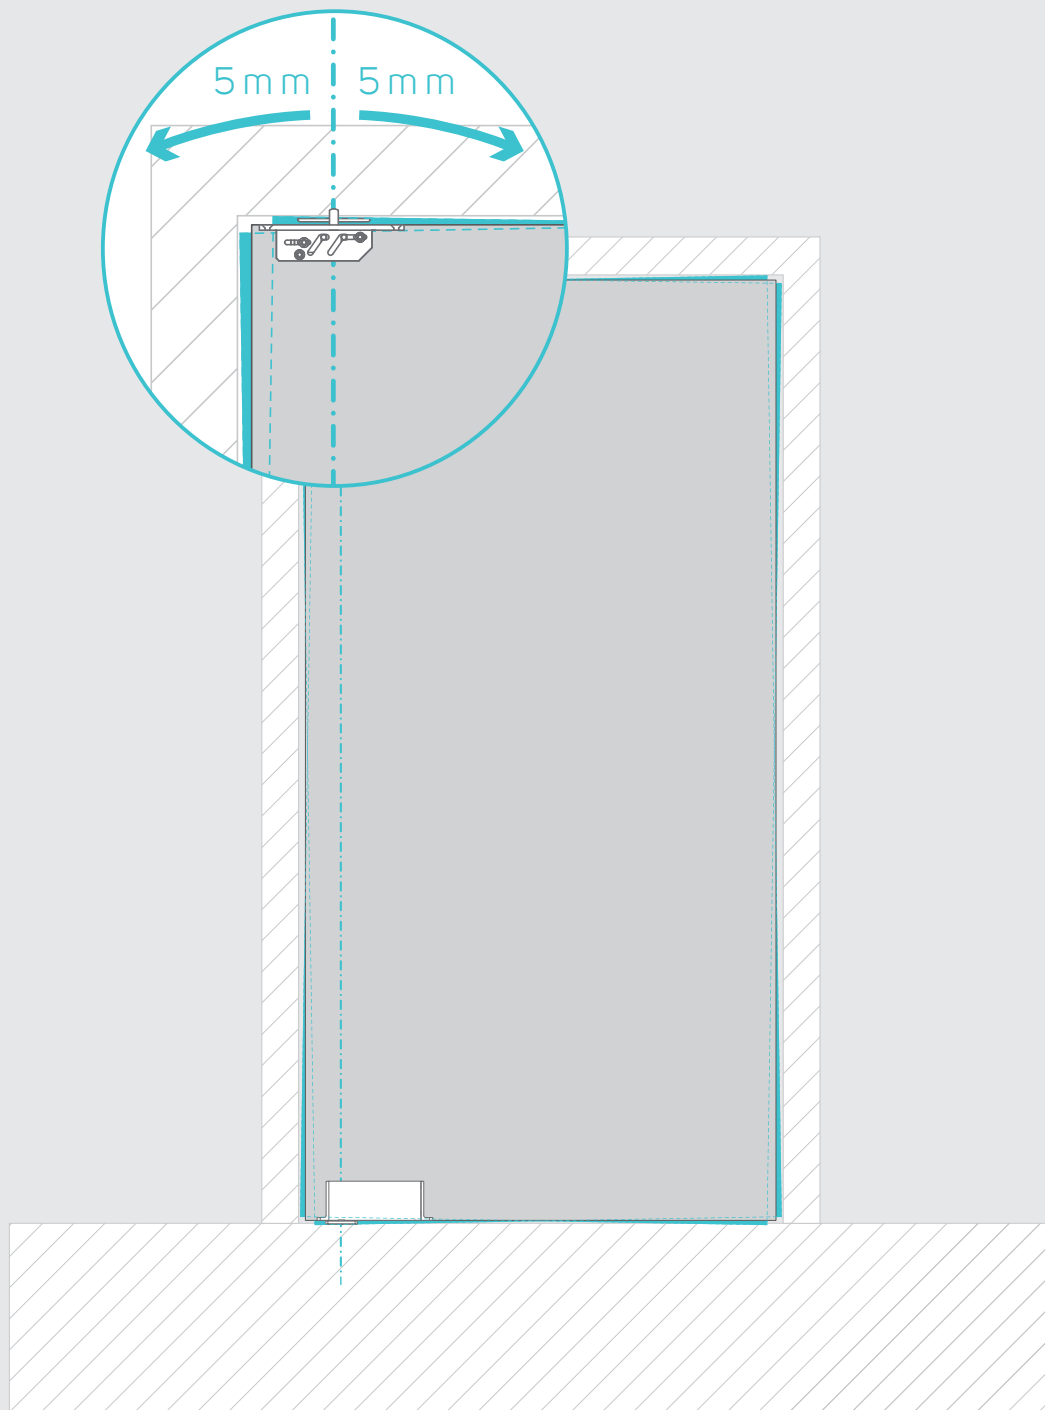

SETTING THE RADIAL POSITION

Remove the cap from the floorplate and adjust the angle of the door using a 3mm hex key.


Important: all 4 screws need to be loosened before setting the radius. Don't forget to tighten them again after adjusting.

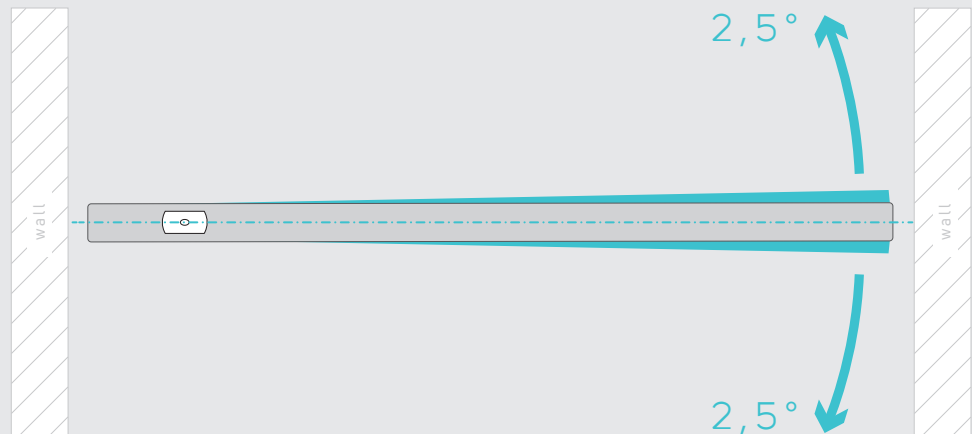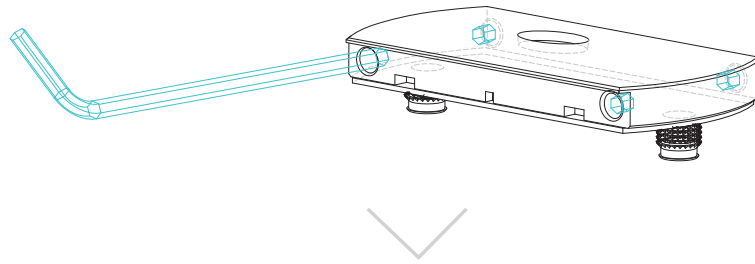

SETTING THE CLOSING SPEED

The closing speed can be adjusted using the included key.

To the right: more closing damping. To the left: less closing damping

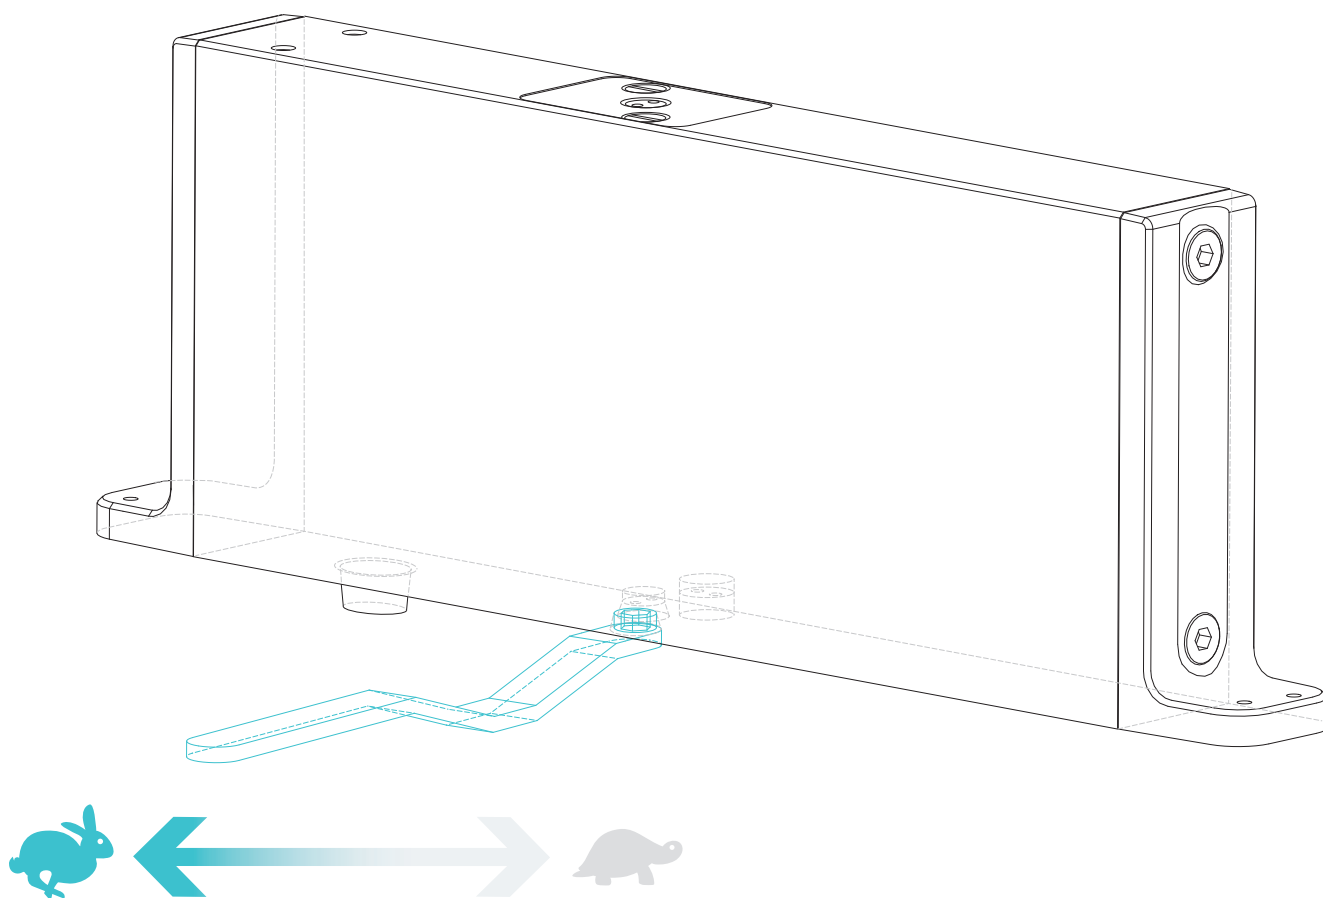

FRITSJURGENS INTERNATIONAL

+31 598 343 410

info@fritsjurgens.com

www.fritsjurgens.com