


BL001 MAGNETIC PASSAGE LATCH FITTING INSTRUCTIONS

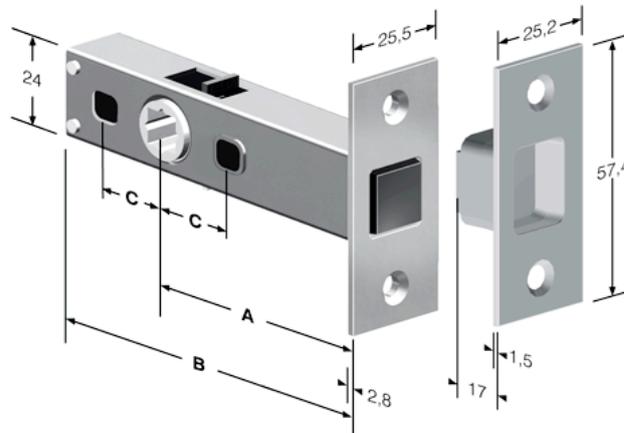

A = 60mm

B = 90mm


C = 17 – 20mm (min.34mm, max. 40mm centre to centre tie through holes)

Latch Installation

- 1 Mark a centre line on the door and the doorframe in the position of where the magnetic latch is to be fitted.
- 2 Drill a hole 25mm diameter by 95mm deep at 90 degrees to the surface in the centre of the end of the door in the position previously marked.
- 3 On the front of the door, drill a hole 15mm diameter 60mm in from the edge of the door along the centre
- 4 Insert latch and faceplate squarely and mark around the faceplate. Remove latch and chisel out a recess 2.8mm deep for the latch and faceplate to rebate into to give a level surface finish.
- 5 Insert latch and faceplate into position and secure with the two screws (6 x 25mm) supplied.

Striker Installation

- 6 Align and mark the position on the doorframe where the latch strike is to be fitted. Chisel out and recess the strike plate 1.5mm to give a level surface finish.
- 7 Insert the strike plate and secure with the two screws (6G x 25mm) supplied.
- 8 Fit door hardware as per manufacturers instructions.

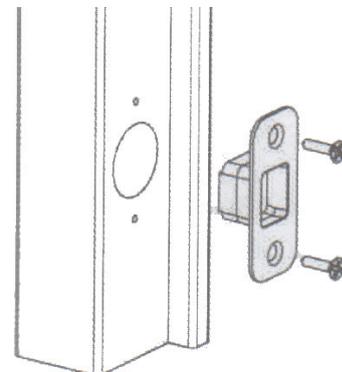

Suitable for Timber and Steel Framed Doors & Jambs