
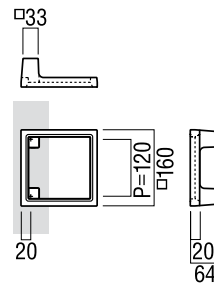
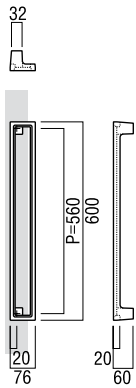
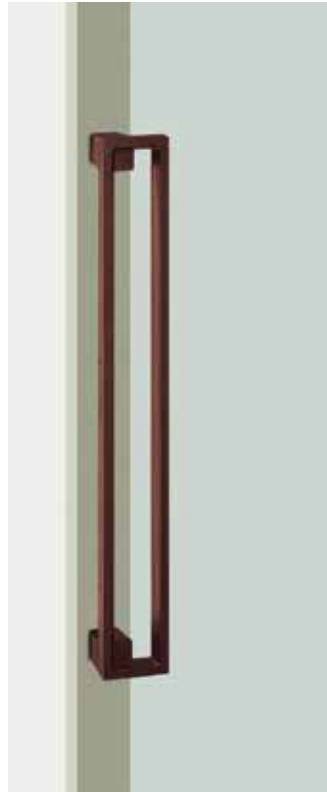


# MEDIUM ENTRY PULLS *by Elmes of Japan*

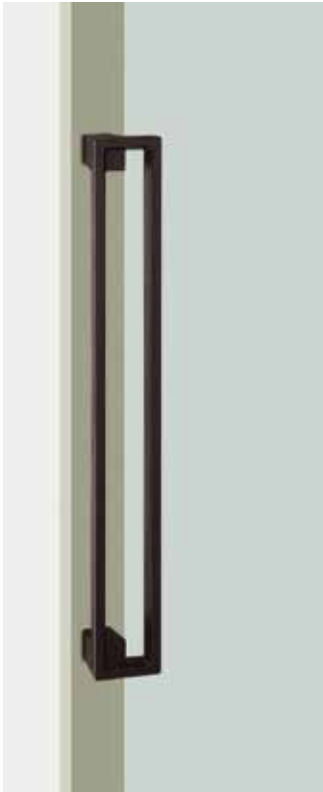

## T2719

**base material**  
Japanese Cast Iron (Nambu-Tetsu)

**available finish**  
Baked Finish Red Rust Colour (R)  
Baked Finish Iron Rust Colour (I)

**available sizes (mm)**  
Length 600, Centres 560

**fixing hole sizes**  
Door 10mm, Glass 16mm

**specification code**  
T2719 - 600 - finish

## T2619

**base material**  
Japanese Cast Iron (Nambu-Tetsu)






**available finish**  
Baked Finish Red Rust Colour (R)  
Baked Finish Iron Rust Colour (I)

**available sizes (mm)**  
Length 160, Centres 120

**fixing hole sizes**  
Door 10mm, Glass 16mm

**specification code**  
T2619 - 160 - finish

# SMALL ENTRY PULLS *by Elmes of Japan*

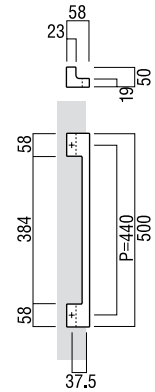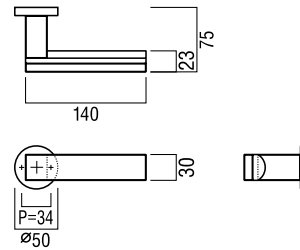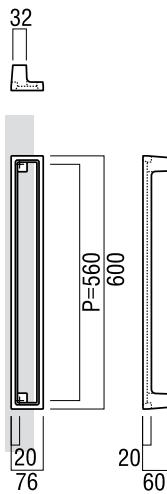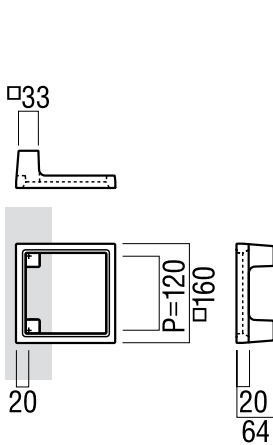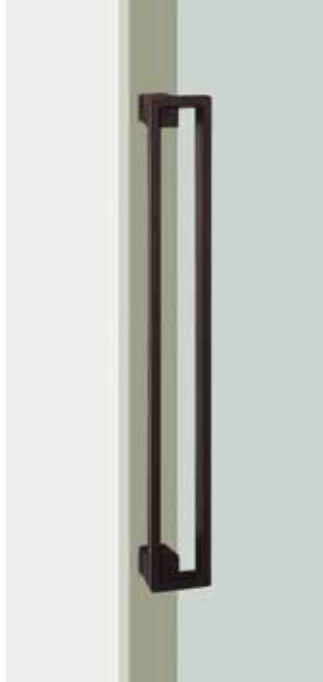

## T2619

**base material**  
Japanese Cast Iron (Nambu-Tetsu)

**available finish**  
Baked Finish Red Rust Colour (R)  
Baked Finish Iron Rust Colour (I)

**available sizes (mm)**  
See dimension image above

**fixing hole sizes**  
Door 10mm, Glass 16mm

**specification code**  
T2619- 160- R  
T2619- 160- I

## T2719

**base material**  
Japanese Cast Iron (Nambu-Tetsu)

**available finish**  
Baked Finish Red Rust Colour (R)  
Baked Finish Iron Rust Colour (I)

**available sizes (mm)**  
Length 600, Centres 560

**fixing hole sizes**  
Door 10mm, Glass 16mm

**specification code**  
T2719- 600- R  
T2719- 600- I

## UL729

**base material**  
Japanese Cast Iron (Nambu-Tetsu)

**available finish**  
Baked Finish Red Rust Colour (R)  
Baked Finish Iron Rust Colour (I)

**type**  
Lock Sets (L)  
Passage Sets (P)  
Privacy sets (PS)

**suitability**  
Internal & External Doors

**specification code**  
UL729 - CP - Type  
UL729 - PB - Type  
UL729 - R - Type

## T1570

**base material**  
Uni-Cast Aluminium

**available finish**  
Anodized Silver (S)

**available sizes (mm)**  
Length 500, Centres 440

**fixing hole sizes**  
Door 8mm, Glass 12mm

**specification code**  
T1570 - 500 - S