


SYSTEM M/ M+ MODEL SELECTOR

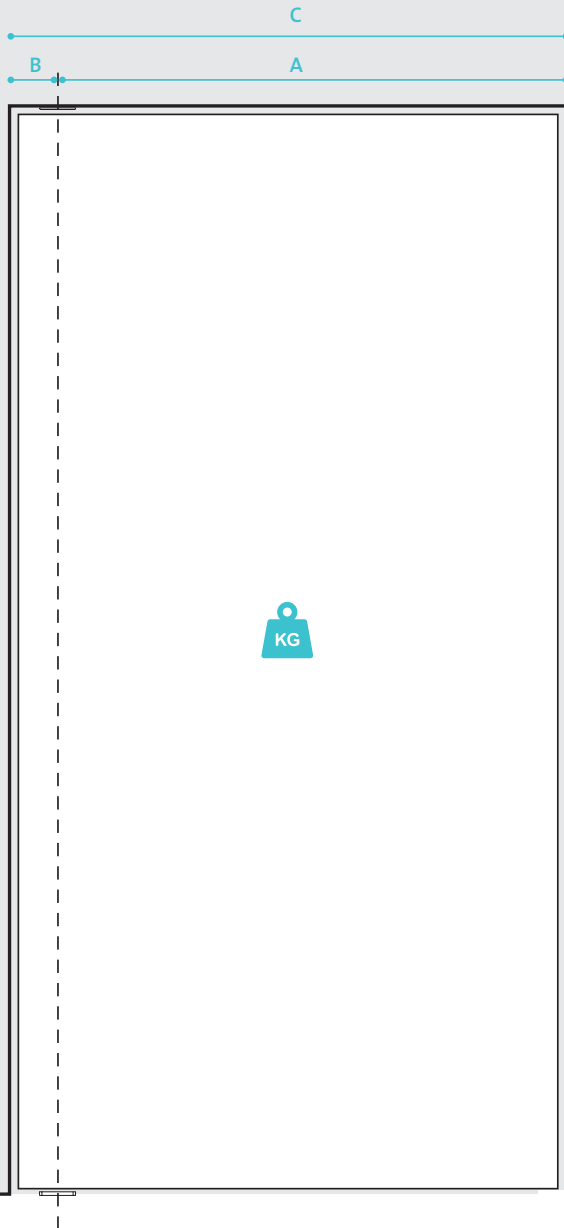

To ensure the pivot system provides the appropriate movement for your door, System M/M+ is available in eight models to suited to the weight and width of the door to ensure the door closes everytime. There are no height limits on the door.

System M/M+ is suitable for pivot doors covering a weight range between 20 and 500kg (subject to the width and weight chart for guaranteed closing). The systems are suitable for single and double action doors, When combined with the door frames, the latch control ensures that the door closes properly.

Fully concealed, the minimum pivot point is 70mm from the edge of the door, this is movable to the midpoint of the door. To maximise opening space for narrow doors, you can use a 40mm fixed pivot point version. This unit is visible on the edge of the door (top & bottom) when the door is open.

EXAMPLE

Use the model selector charts on the following pages:

Door specifications: Width: 1600mm, height 3200mm, weight 165kg.

The distance between the pivot point and the side of the door is 70mm

1. Determine the distance of pivot point to the latch side of the door:

$$C \text{ minus } B = A: 1530 \text{ mm}$$

2. Check the door width

$$C = 1600 \text{ mm}$$

3. Fill in the weight


$$KG = 165 \text{ kg}$$

The following system suits this door:

FJS/STM+70DSSS

Does your pivot door have other measurements than shown here? Please do not hesitate to contact us. FritsJurgens has an on-site testing facility which enables us to determine whether our systems are suitable for your specific situation.

FritsJurgens by Bellevue Architectural | +61 3 9571 5666 | info@bellevuearch.com.au | www.bellevuearch.com.au

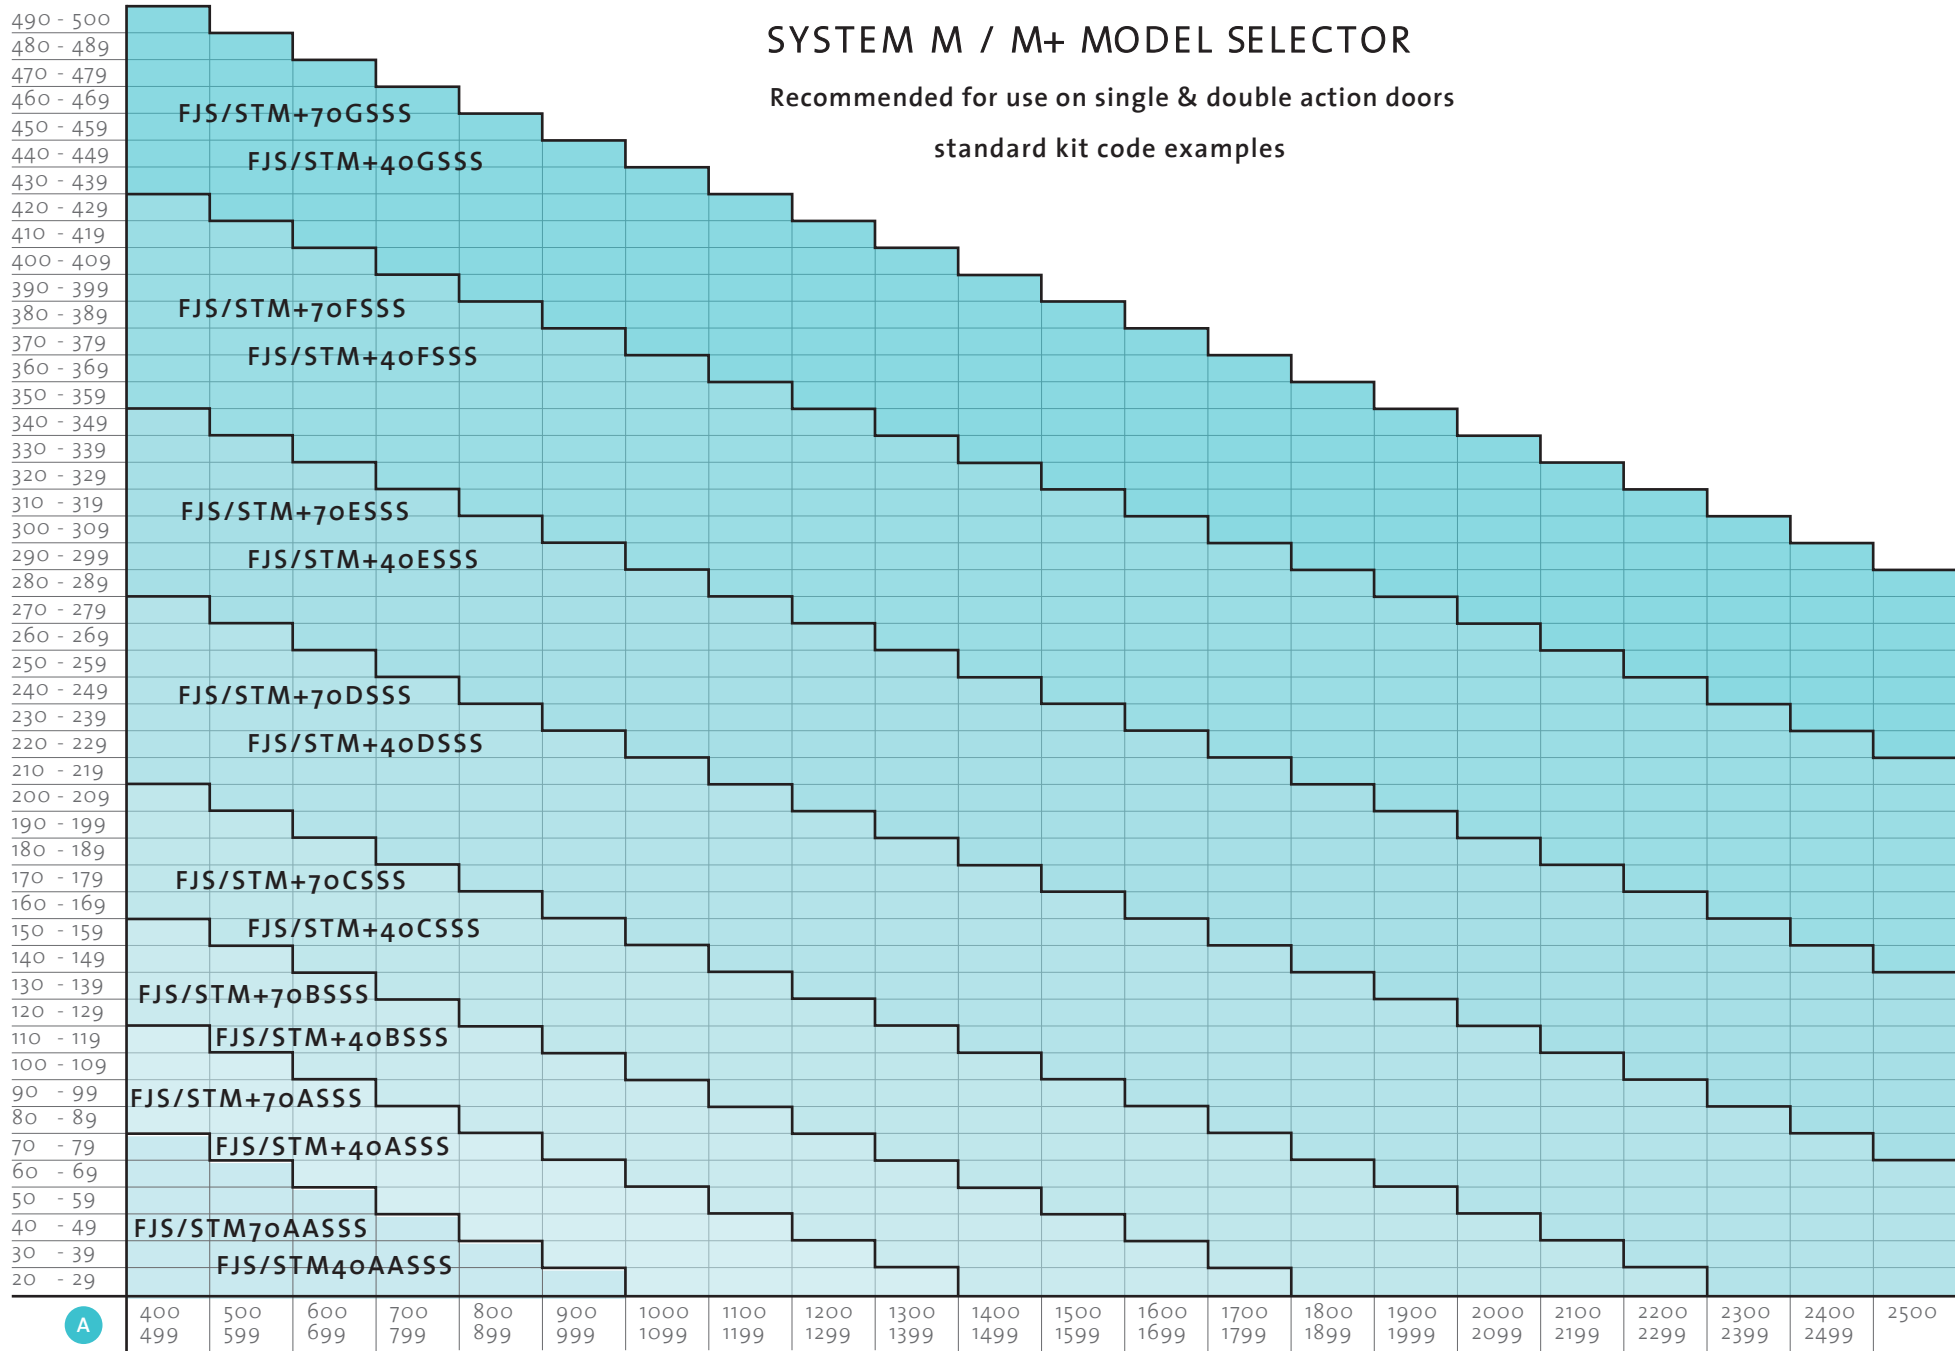

70mm Pivot point specification codes



Kit finish: Satin stainless steel

FJS/STM70AASSS
FJS/STM+70AASS
FJS/STM+70BSSS
FJS/STM+70CSSS
FJS/STM+70DSSS
FJS/STM+70ESSS
FJS/STM+70FSSS
FJS/STM+70GSSS

Kit supplied with
standard floor plate

Kit finish: Black

FJS/STM70AASBK
FJS/STM+70ASBK
FJS/STM+70BSBK
FJS/STM+70CSBK
FJS/STM+70DSBK
FJS/STM+70ESBK
FJS/STM+70FSBK
FJS/STM+70GSBK



Kit supplied with
flush floor plate

Kit finish: Satin stainless steel

FJS/STM70AAFSSS
FJS/STM+70AFSSS
FJS/STM+70BFSSS
FJS/STM+70CFSSS
FJS/STM+70DFSSS
FJS/STM+70EFSSS
FJS/STM+70FFSSS
FJS/STM+70GFSSS

Kit finish: Black

FJS/STM70AAFBSBK
FJS/STM+70AFBSBK
FJS/STM+70BFBSBK
FJS/STM+70CFBSBK
FJS/STM+70DFBSBK
FJS/STM+70EFBSBK
FJS/STM+70FFBSBK
FJS/STM+70GFBSBK



40mm Pivot point specification codes



Kit finish: Satin stainless steel

FJS/STM40AASSS
FJS/STM+40AASS
FJS/STM+40BSSS
FJS/STM+40CSSS
FJS/STM+40DSSS
FJS/STM+40ESSS
FJS/STM+40FSSS
FJS/STM+40GSSS

Kit supplied with
standard floor plate

Kit finish: Black

FJS/STM40AASBK
FJS/STM+40ASBK
FJS/STM+40BSBK
FJS/STM+40CSBK
FJS/STM+40DSBK
FJS/STM+40ESBK
FJS/STM+40FSBK
FJS/STM+40GSBK



Kit supplied with
flush floor plate

Kit finish: Satin stainless steel

FJS/STM40AAFSSS
FJS/STM+40AFSSS
FJS/STM+40BFSSS
FJS/STM+40CFSSS
FJS/STM+40DFSSS
FJS/STM+40EFSSS
FJS/STM+40FFSSS
FJS/STM+40GFSSS

Kit finish: Black

FJS/STM40AAFBSBK
FJS/STM+40AFBSBK
FJS/STM+40BFBSBK
FJS/STM+40CFBSBK
FJS/STM+40DFBSBK
FJS/STM+40EFBSBK
FJS/STM+40FFBSBK
FJS/STM+40GFBSBK

