


## SYSTEM M+ MODEL SELECTOR

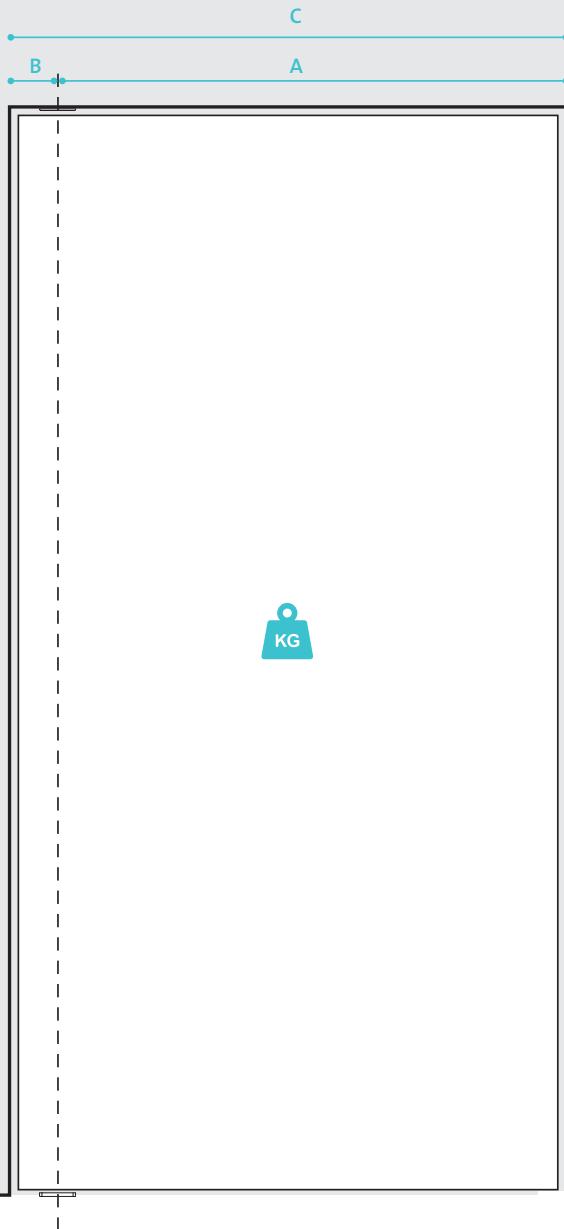

To ensure the pivot system provides the appropriate movement for your door, System M+ is available in eight models suited to the weight and width of the door to ensure the door closes every time. There are no height limits on the door.

System M+ is suitable for pivot doors covering a weight range between 20 and 500kg (subject to the width and weight chart for guaranteed closing). The systems are suitable for single and double action doors. When combined with the door frames, the latch control ensures that the door closes properly.

Fully concealed, the minimum pivot point is 70mm from the edge of the door, this is movable to the midpoint of the door.

To maximise opening space for narrow doors, you can use a 40mm fixed pivot point version. This unit is visible on the edge of the door (top & bottom) only when the door is open.

### EXAMPLE

Use the model selector charts on the following page:

Door specifications: Width: 1600mm, height: 3200mm, weight: 165kg.

The distance between the pivot point and the side of the door is 70mm

1. Check the door width  
**C = 1600 mm**
2. Determine the distance of pivot point to the latch side of the door:  
**C minus B = A 1530mm**

1. Fill in the weight  
**KG = 165 kg**

The following system suits this door:

**FJS/STM+70DSSS**

Does your pivot door have other measurements than shown here? FritsJurgens has an on-site testing facility which enables us to determine whether our systems are suitable for your situation.

FritsJurgens by Bellevue Architectural | +61 3 9571 5666 | info@bellevuearch.com.au | www.bellevuearch.com.au



# SYSTEM M+ MODEL SELECTOR

Recommended for use on single & double action doors

