


Ceiling plates




A ceiling plate is the component installed in the ceiling or top frame that connects with the top pivot of a FritsJurgens system. It receives the pin from the top pivot and ensures secure anchoring of the door. Depending on the type of top pivot and installation situation, different ceiling plate variants are available.

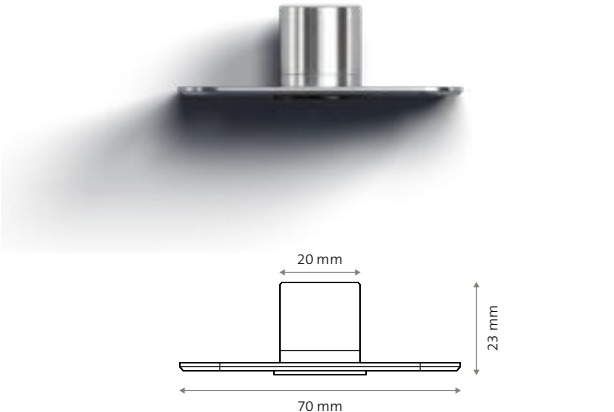

Ceiling plate
Class G

Pin diameter	Ø15 mm
Dimensions	70 × 40 × 23 mm
Material	Stainless steel
Available colours	Stainless steel Black
Compatible with	
Top pivots	Top pivot – 40 mm Class G Top pivot – 70 mm Class G

The standard ceiling plate is mounted in the ceiling above the pivot door. It guides the pin of the top pivot into the ceiling and ensures that the door stays securely aligned and in place.

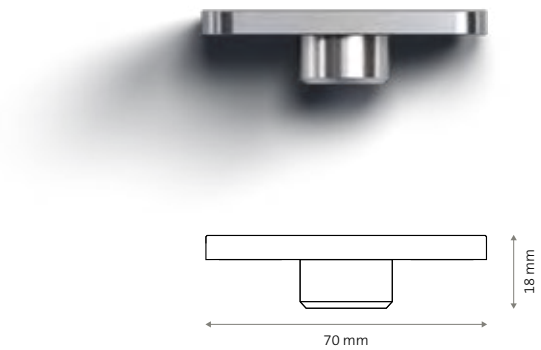


Receiver


Pin diameter	Ø15 mm
Dimensions	70 × 32 × 18 mm
Material	Stainless steel
Available colours	Stainless steel
Compatible with	
Top pivots	Top pivot – Reversed

The Receiver is mounted inside the top of the pivot door. The pin of the top pivot Reversed is rotated downwards into the Receiver during the installation.

Floor Plates


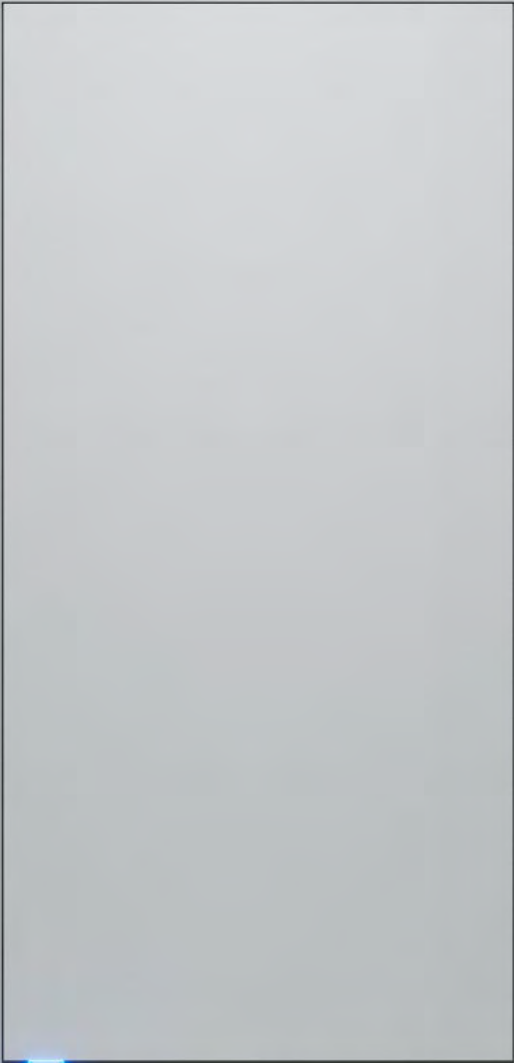


We offer various floor plates to match the pivot hinge of your choice and the design of your pivot door.

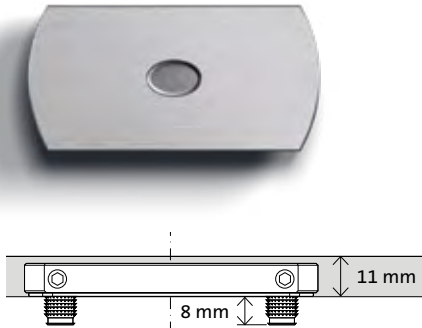

Floor plate squared – Radially adjustable

Mounting pins	Two or four 8 mm pins for optimal stability between two floor types. Or two 30 mm pins for mounting on layered floor materials.
Undercut	11 mm
Adjustability	Radial: +2.5° to -2.5°
Dimensions	80 × 40 × 9 mm
Material	Stainless steel
Available colours	Stainless steel Black

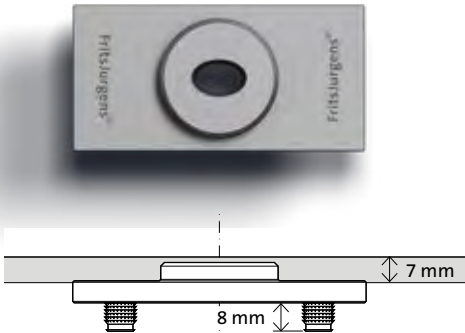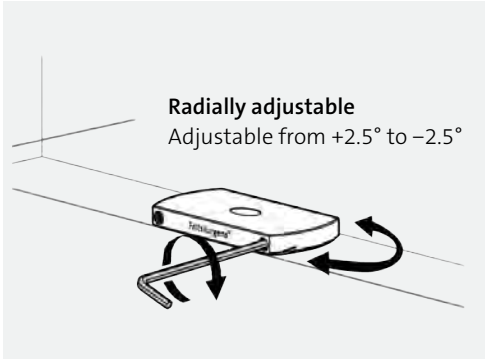

Floor plate Flush squared – Non-adjustable

Mounting pins	Four 8 mm pins
Undercut	7 mm
Adjustability	No
Dimensions	80 × 40 × 11 mm
Material	Stainless steel
Available colours	Stainless steel Black



The floor plate is available in two finishes: brushed stainless steel and PVD black. Choose between a flush or a standard version. The floor plates by FritsJurgens are made of solid tempered steel and therefore fully scratch resistant. The ceiling plate is available in brushed stainless steel and black as well and can be obtained in the rectangular version only.

FritsJurgens by Bellevue Architectural | +61 3 9571 5666 | info@bellevuearch.com.au | www.bellevuearch.com.au

ACCESSORIES:FLUSH FLOOR PLATE



SPECIFICATIONS

Types	FritsJurgens floor plate Flush square (see below for ordering codes) FritsJurgens floor plate Flush rounded (see below for ordering codes)
Dimensions	80 x 40 x 9 mm

FOR TYPES OF DOORS

Door acting	Double-action Single-action
Weight capacity	0-500 KG
Door width	N/A
Min. door thickness	40mm
Pivot point	Min.40 mm from pivot point to short side
Ordering codes:	FJVP8040MSS/FLSQ - Flush square end floor plate - Satin stainless steel FJVP8040MEMB/FLSQ - Flush square end floor plate - Electro matt black

It is also possible to upgrade a kit you are purchasing to include the flush floor plate. Please contact Bellevue Architectural for assistance.



INSTALLATION

