

Schall-Ex® L-8/30 WS

Model: BAA1000

the narrowest drop seal solution


Schall-Ex® L-8/30 WS

Athmer drop seal only 8mm thick



Max length up to 2000mm

Seal Measurements

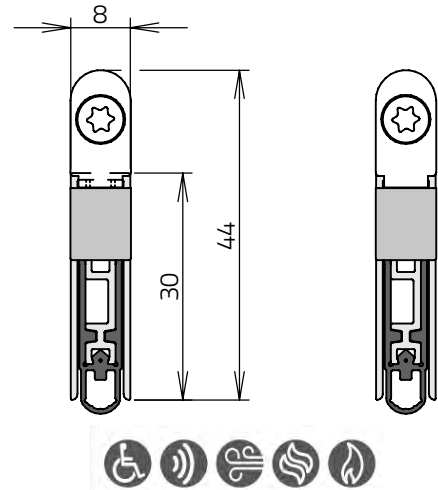

Athmer Schall-Ex® L8/30 WS – for dependable acoustic sealing in an exceptionally slim design. At only 8mm wide, this automatic drop seal integrates discreetly into narrow door constructions while delivering a smooth, precise threshold closure.

Its robust construction ensures reliable operation under frequent use, supporting lasting performance across commercial, residential and architectural applications. Proven Athmer engineering provides the longevity required for demanding projects, helping create quieter, more comfortable interiors without compromising appearance or design flexibility.

Specify the Schall-Ex® L8/30 WS with confidence for an enduring solution that combines acoustic performance, durability, compact dimensions and German craftsmanship in every installation.

REBATE DIMENSIONS

Rebate Width: 8mm
Rebate Height: 30mm
Max Travel (Gap): 20mm

PERFORMANCE

Acoustic: up to **49 dB** over 7mm gap
Fire: UL10C (R31866) 
Smoke: Certifire TS21 (CF 5675)
Function: MPA Certified, tested to 1 million cycles
Guarantee: 5 years

APPLICATION

Door Type: hinged timber doors
Application: single leaf, double leaf
Location: internal & external doors
Handed: no

TECHNICAL DATA

Actuator: single sided
Material: self-extinguishing fire-retardant silicone
Fixing: WS fixing brackets (included)
Floor Gap: 7mm
Movement: parallel actuation & self-levelling
Manufactured: 100% Made in Germany

LENGTH

Minimum Length: 235mm
Maximum Length: 2000mm

FEATURES

- Narrowest drop seal profile available for wood doors
- Door seal easily adjusted without tools
- Removable actuator deactivates during construction
- Parallel actuation minimizes friction with the floor
- No lateral travel on activation for sealing at jamb
- Inner profile is easily removed for maintenance
- Made sustainably entirely in Germany

Order codes & available lengths

BAA1000/0620	Schall-Ex® L-8/30 WS 620mm cut back to 504mm
BAA1000/0820	Schall-Ex® L-8/30 WS 820mm cut back to 648mm
BAA1000/0920	Schall-Ex® L-8/30 WS 920mm cut back to 798mm
BAA1000/1070	Schall-Ex® L-8/30 WS 1070mm cut back to 923mm
BAA1000/1210	Schall-Ex® L-8/30 WS 1210mm cut back to 1048mm
BAA1000/1333	Schall-Ex® L-8/30 WS 1333mm cut back to 1207mm
BAA1000/1500	Schall-Ex® L-8/30 WS 1500mm cut back to 1457mm
BAA1000/1625	Schall-Ex® L-8/30 WS 1625mm cut back to 1575mm
BAA1000/1833	Schall-Ex® L-8/30 WS 1833mm cut back to 1616mm
BAA1000/2000	Schall-Ex® L-8/30 WS 2000mm cut back to 1878mm