



# FritsJurgens®

TOP PIVOT REVERSED  
TECHNICAL DATA SHEET


# OVERVIEW

This top pivot is slightly different from all the others: Top pivot Reversed can be placed in the head jamb or ceiling. As a result, extra thin door frames can be used because no system needs to be incorporated in the top of the door. For example, you can opt for an extra-large glass opening. Thanks to its placement in the ceiling, this system is not adjusted from the side of the door, but from inside the door opening.

## COMPONENTS

---

- 1 Top pivot Reversed
- 2 Cover plate
- 3 Receiver
- 4 Adapters with filler plates (optional)

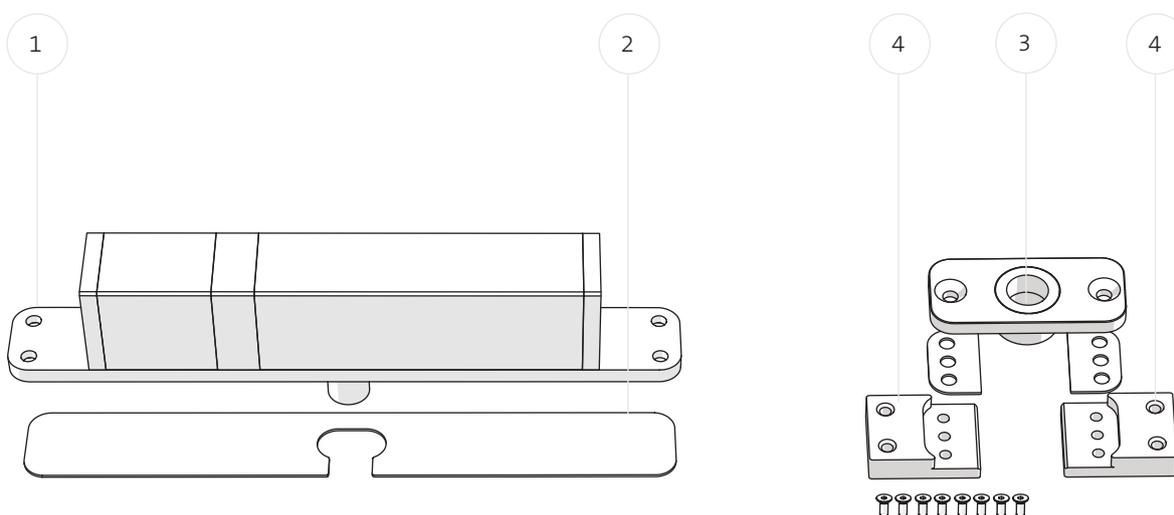

### Exterior pivot doors

When installing an exterior door, there's always a head jamb where Top pivot Reversed can be installed in.


### Smaller frames, more glass

With the top pivot installed in the head jamb or ceiling you can design a pivot door with smaller frames and a larger glass opening.

### Easy installing

Thanks to its placement in the head jamb or ceiling, this system is adjusted from the ceiling: convenient for middle placement.

# TECHNICAL SPECIFICATION

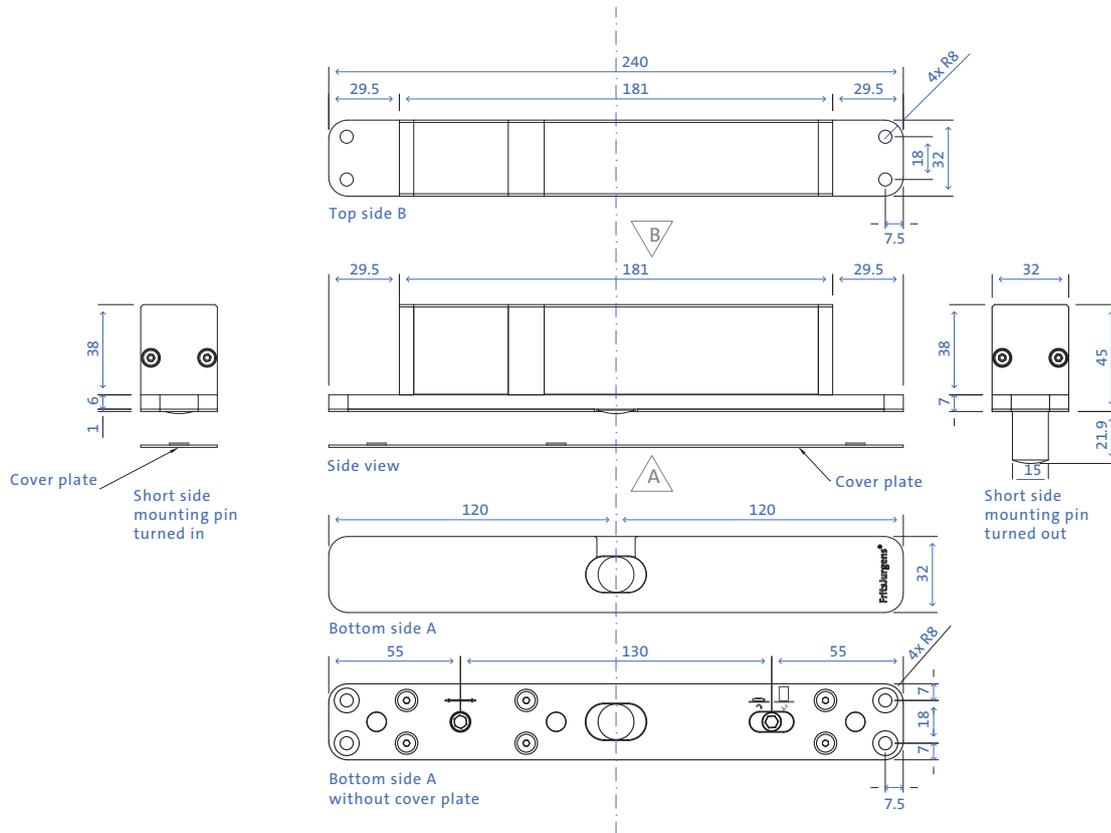

FEATURES	TOP PIVOT REVERSED
Pivot position	Variable from 130 mm
Placement type	Side and middle placement
Top pivot placement	Top jamb
Adjustment	From the top jamb
Suitable for	System One, System 3, System M & System M+
Cover plates	Yes
Cover plate finish	Stainless steel Black White



# HINGE PLATE

## Receiver

### FOR TOP PIVOT REVERSED

When ordering Top pivot Reversed, a square receiver is included in the order. The receiver is mounted inside the top of the pivot door. The pin of Top pivot Reversed is rotated downwards into the receiver during the installation.



## Cover Plates



**SS**  
Stainless steel  
(plates and pivot covers)



**BK**  
Black  
(plates and pivot covers)



**WT**  
White  
(plates and pivot covers)

\* Cover plates are only available for System M+/M 40 mm bottom and top pivots and Top Pivot TP-R.

---

# ACCESSORIES


## Adapters

The adapters can be used to mount the components in a metal profile. The two adapters are mounted in the profile first. They then offer a solid base to mount the component on. We currently offer adapters for 2 mm thick profiles only. This product is compatible with all top pivots, and with bottom pivots System One and System 3.




# MILLING INSTRUCTIONS

For steel or aluminium profile doors

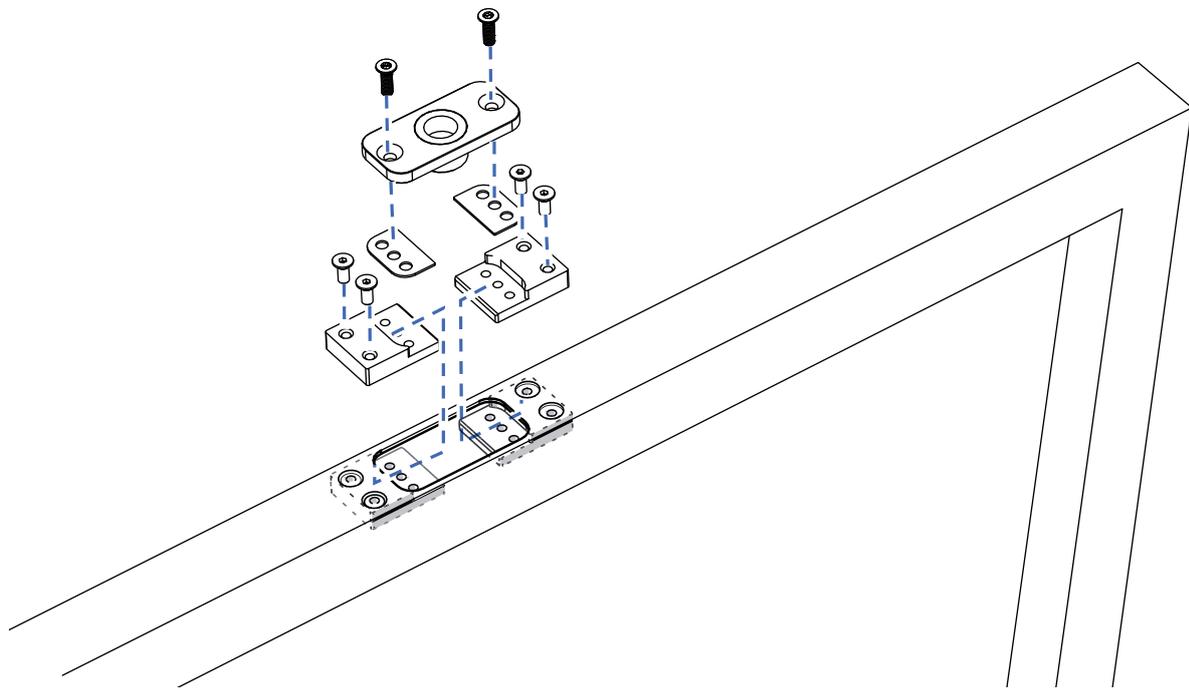


For wooden doors

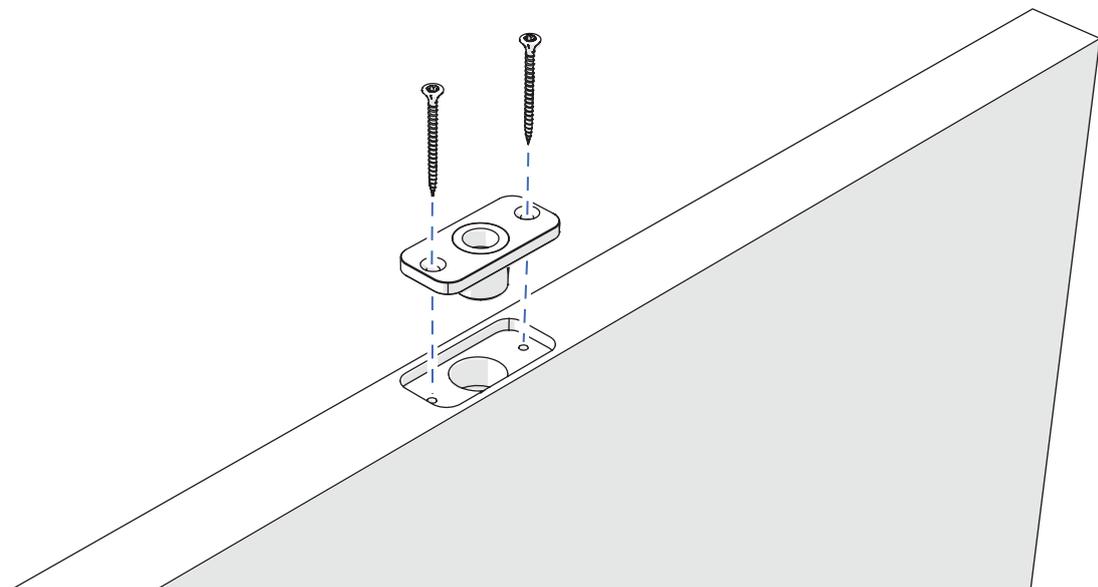



# PIVOT POINTS

System M+, pivot position  $\geq 130$  mm (Class A-E)

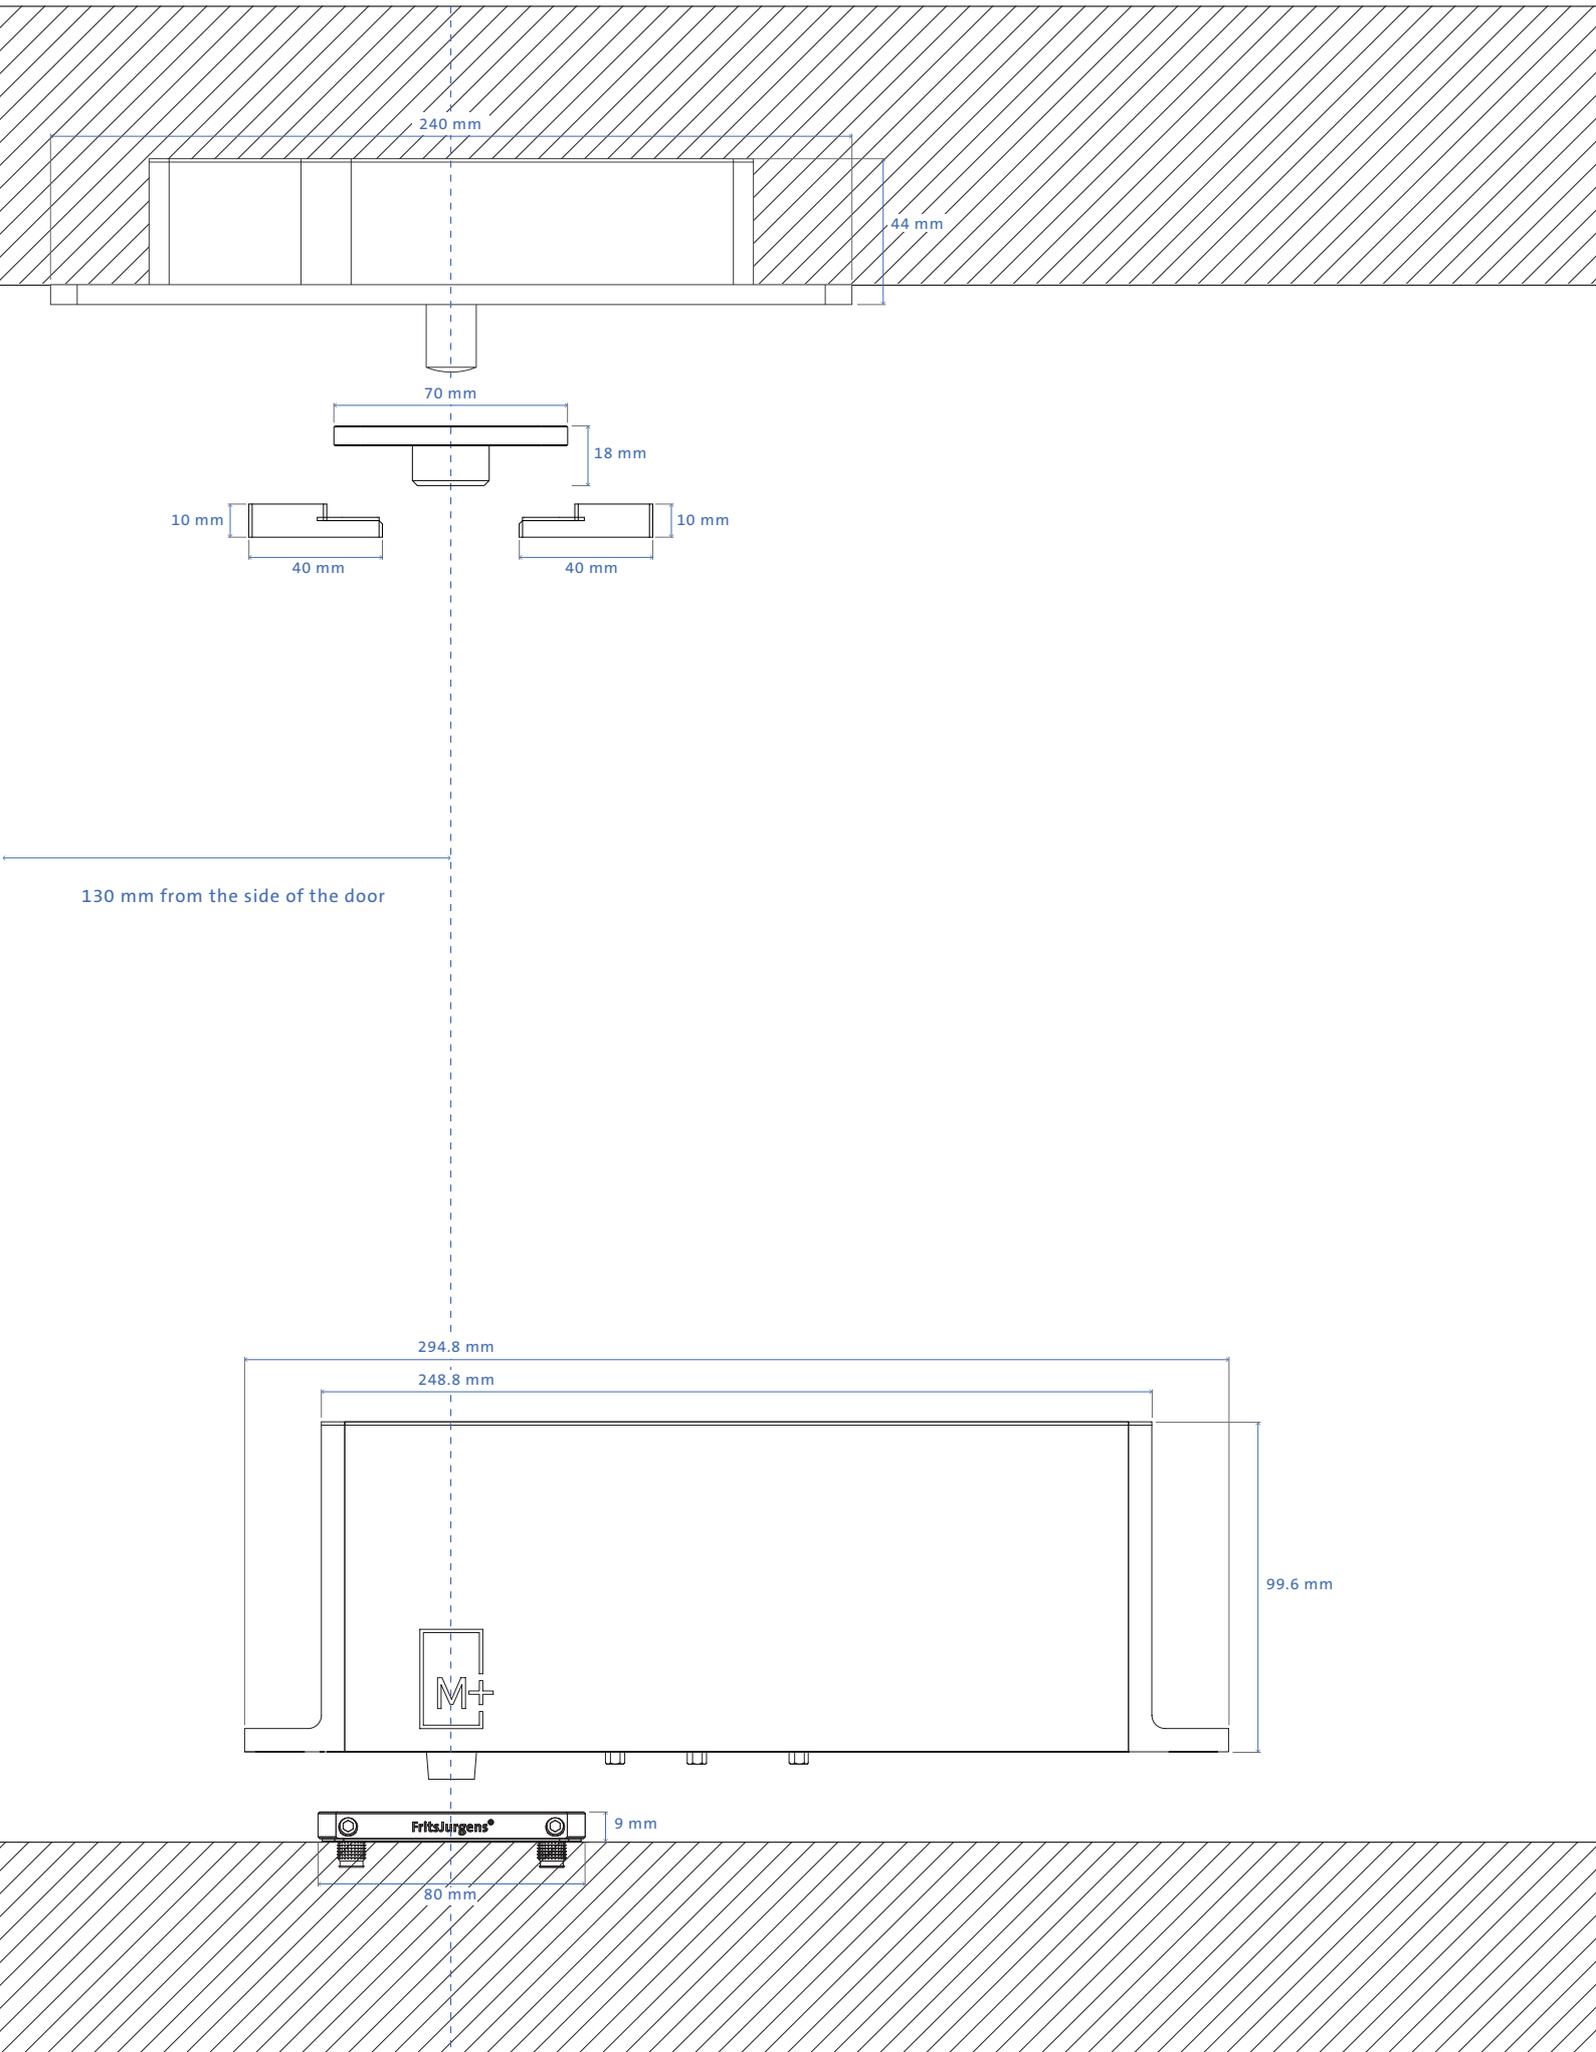

System 3, pivot as middle position of door width (with TP-R)

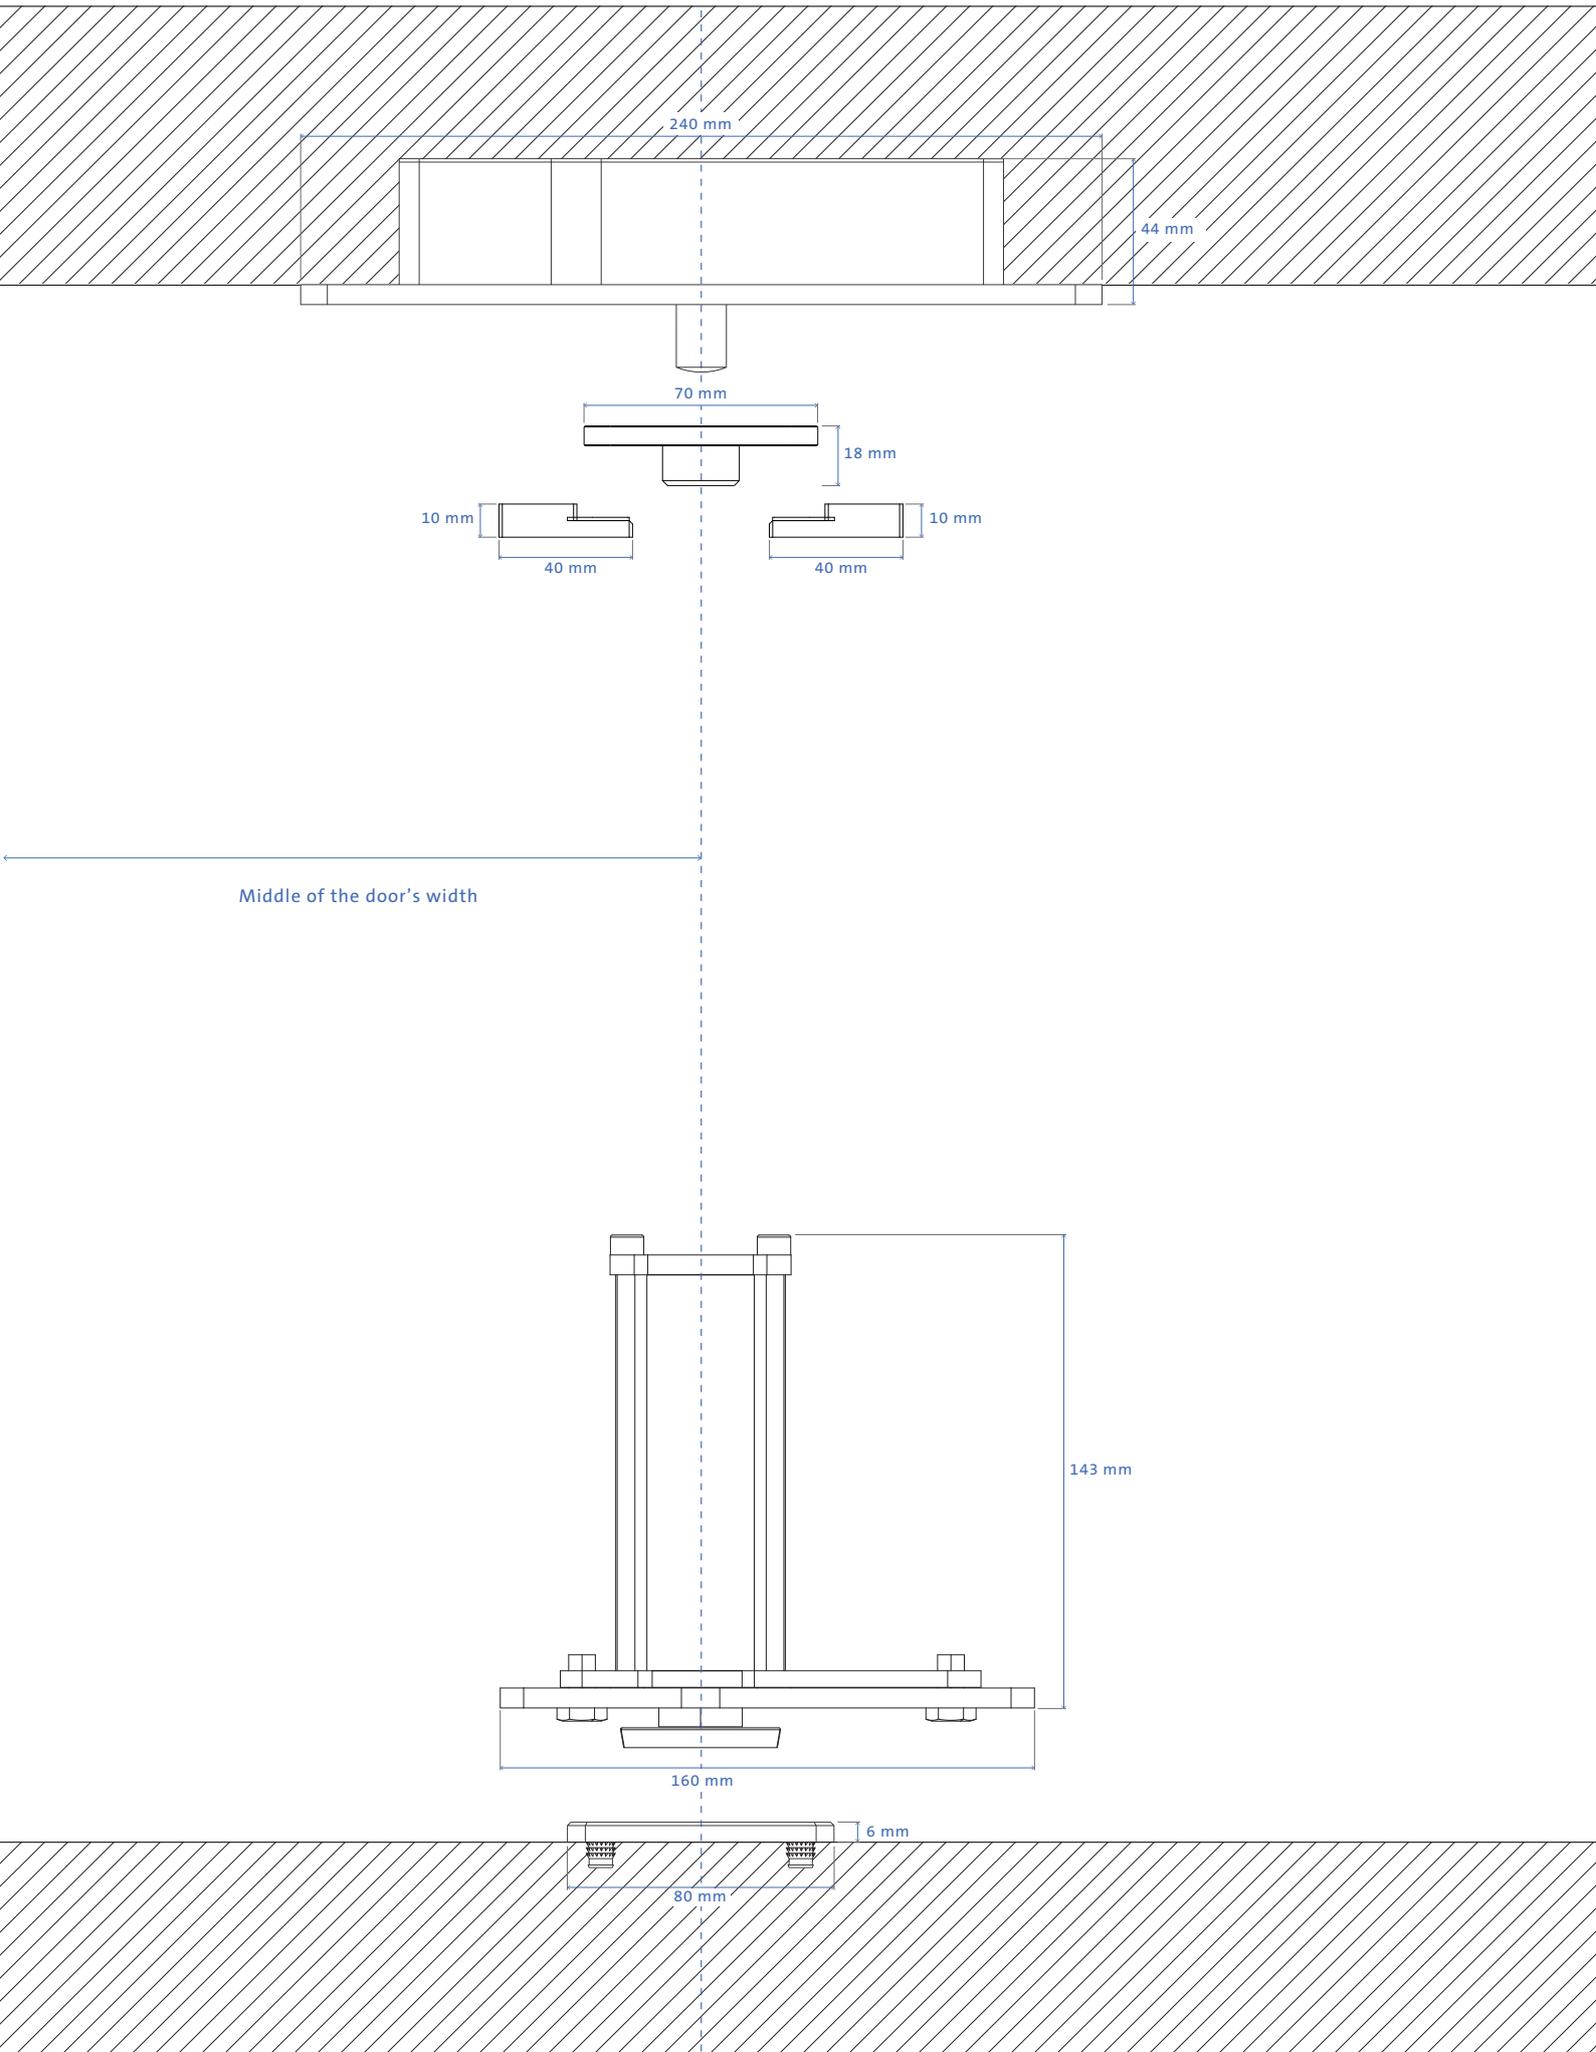

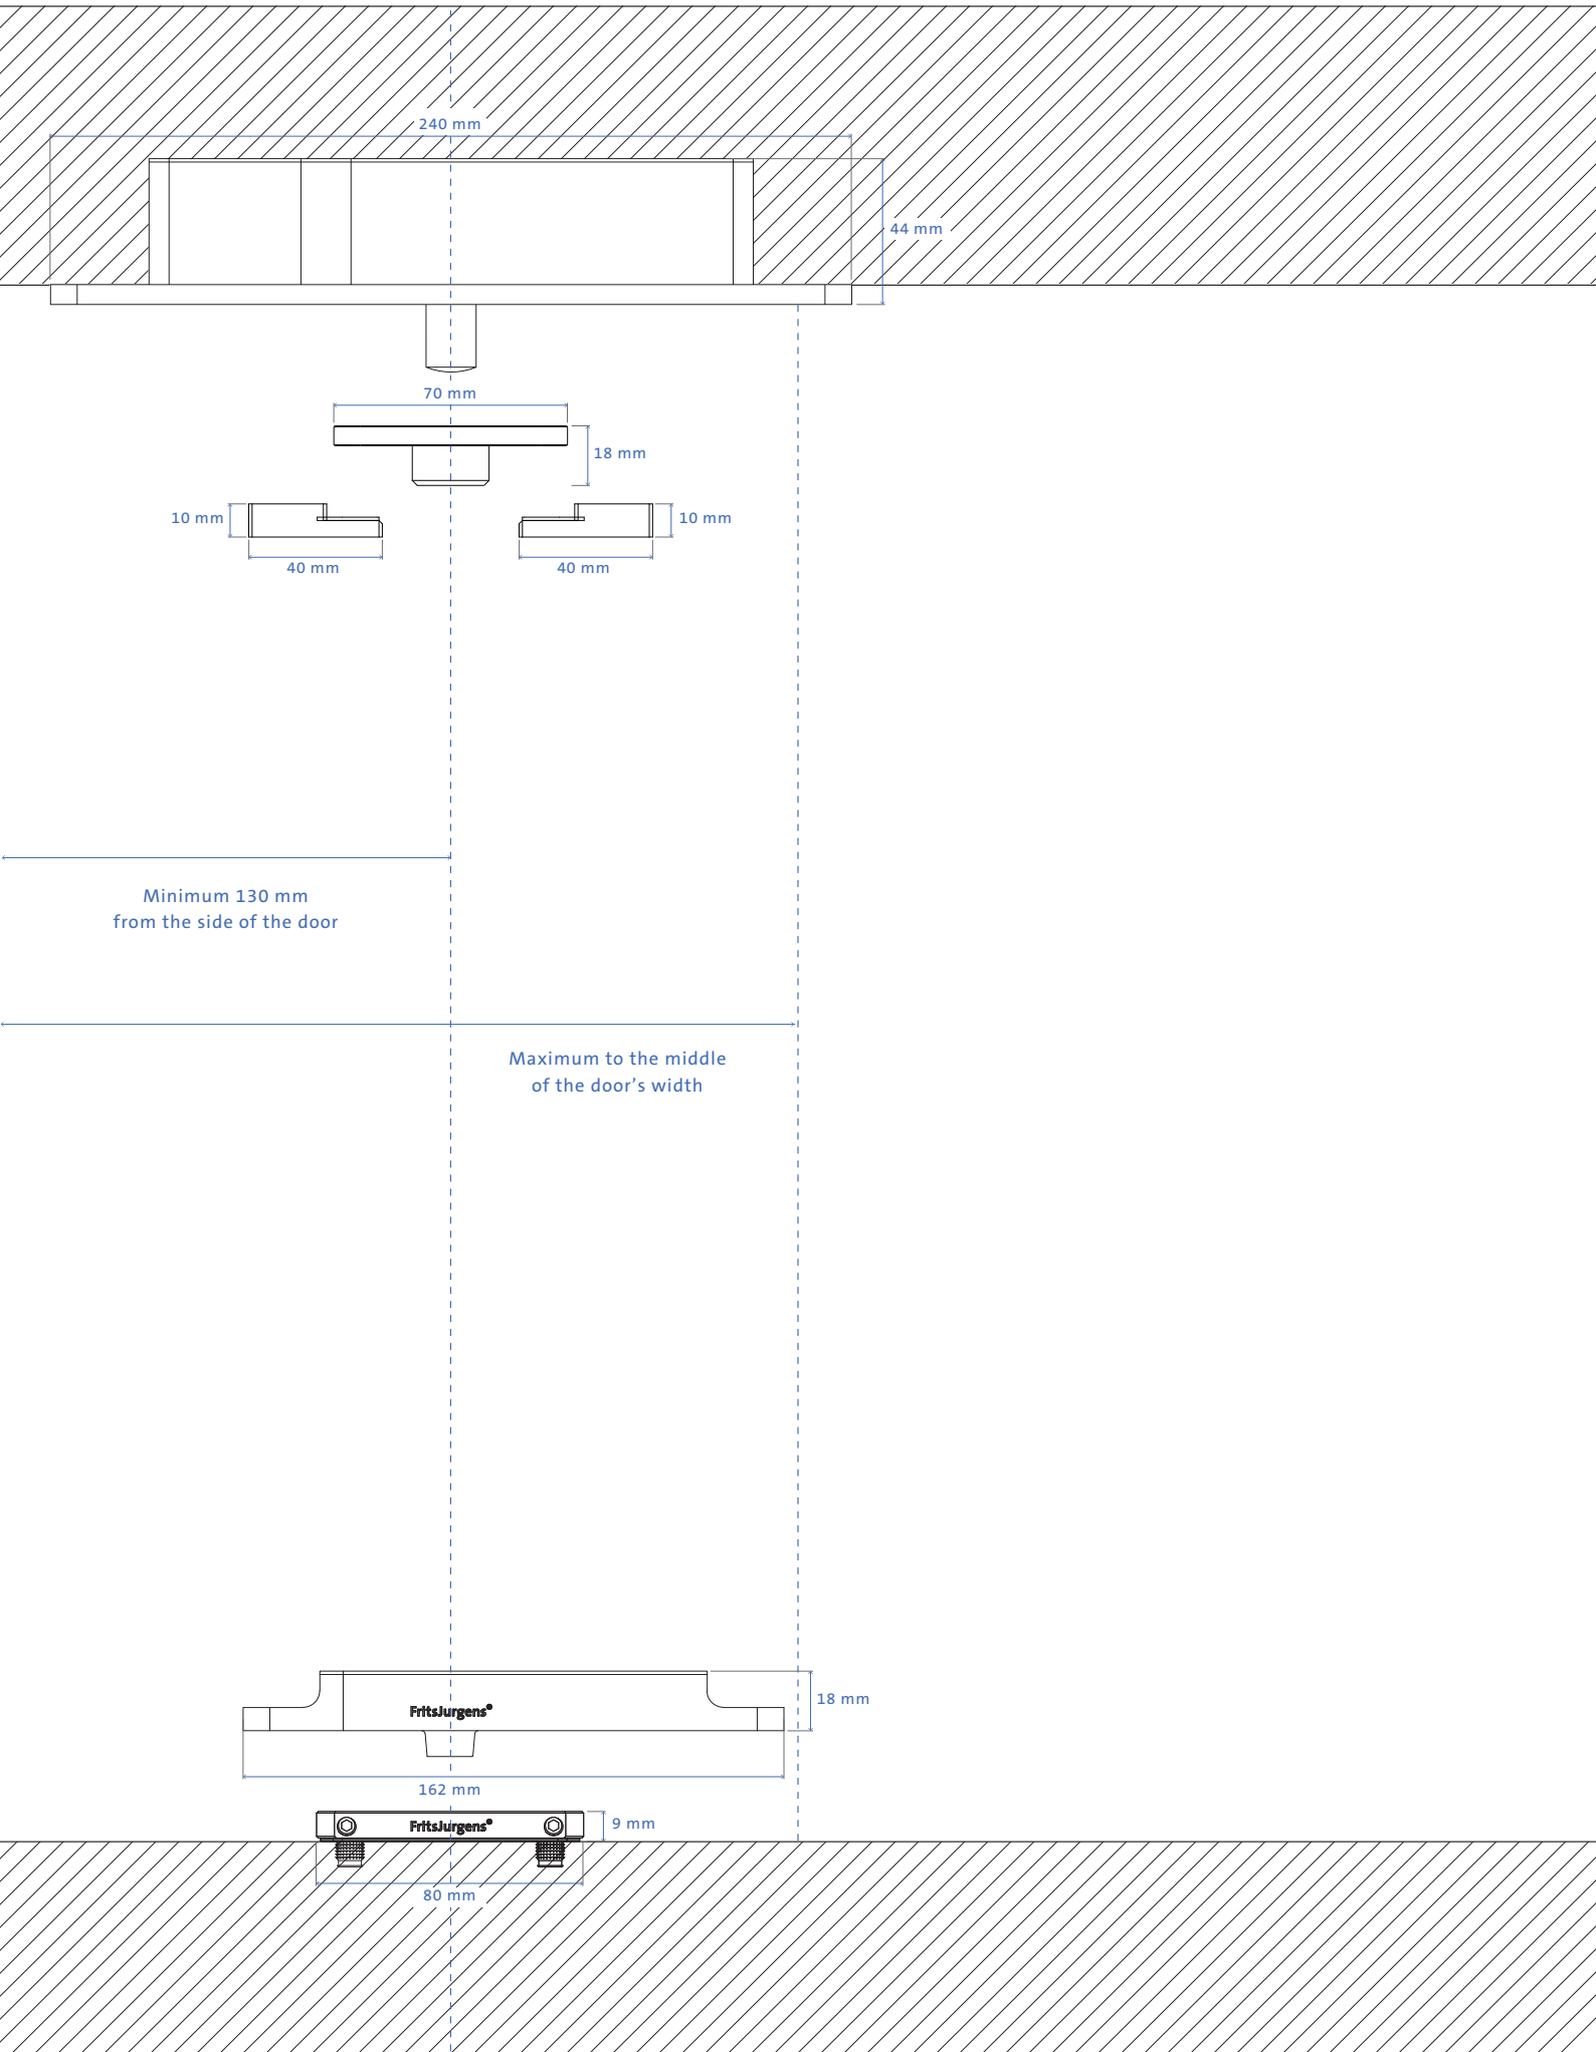

# FritsJurgens®

## FRITSJURGENS INTERNATIONAL

A. Einsteinlaan 1  
9615 TE Kolham  
The Netherlands  
+31 598 343 410  
info@fritsjurgens.com

## FRITSJURGENS ITALY (REGIONAL SALES OFFICE)

Via Marsilio Ficino 22  
50132 Firenze  
Italy  
+39 055 064 0290  
info@fritsjurgens.com

## FRITSJURGENS CONSULTING FZE (REGIONAL SALES OFFICE)

Premises No. HD67  
Floor 25  
Sheikh Rashid Tower  
Dubai World Trade Centre  
Dubai, UAE

BO.tech.TP-R.EN  
Copyright © FritsJurgens®  
31-03-2023



8 720681 609133



[www.fritsjurgens.com](http://www.fritsjurgens.com)